Asennusohje

Noudata numeroituja alkuperäiskuvia. Käytä kunkin vaiheen yhteydessä ilmoitettuja ruuveja ja kiinnikkeitä; merkinnät on säilytetty kuvissa. Radio ei sisälly asennussarjaan.

1. Yhdistä pääyksikkö metallikannakkeeseen ja kytke liitäntäkaapeli pääyksikköön.

2. Kiinnitä asennuslevyt pääyksikköön.

3. Yhdistä pääyksikkö kuvassa esitettyyn kiertomekanismin osaan.

4. Kiinnitä kuvassa esitetty kiertomekanismin osa pääyksikköön.

5. Yhdistä radion pääyksikkö näytön jalustaan.

6. Asenna metallikehys autoon ja työnnä pääyksikkö metallikehyksen sisään.


7. Yhdistä näyttö näytönpitimeen.

8. Asenna radion pääyksikkö ja kiinnitä näyttö.

DVN-T5TPAPT · Asennusohje


Assembly Instruction

1

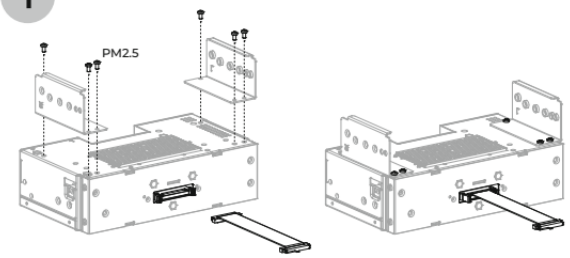


Put the main unit and metal bracket together
and connect the connection cable to the main unit

2

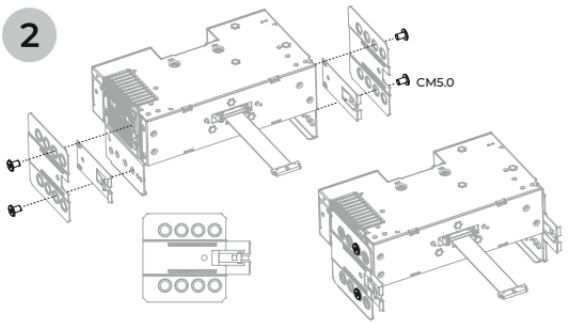


Put the main unit and mounting plates together

3

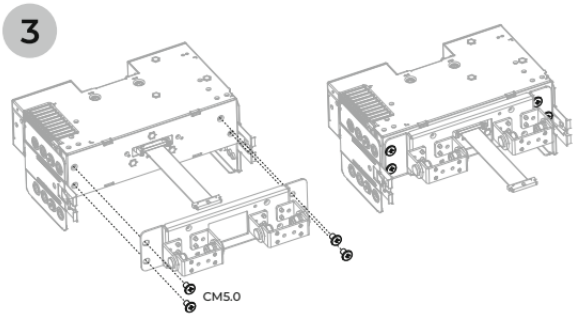


Put the main unit and rotary damper together

4

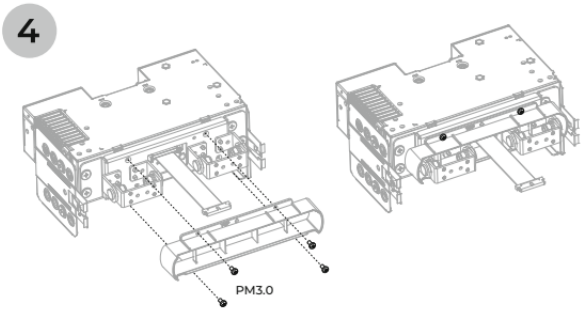


Put the main unit and rotary damper together

5

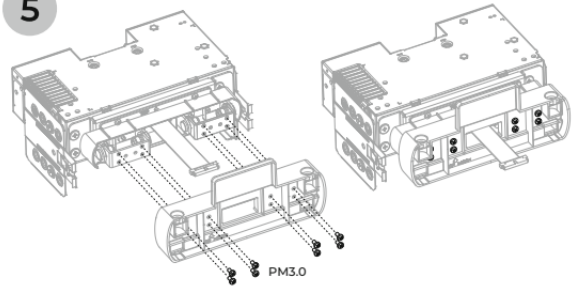


Put the radio main unit and monitor stand together

6

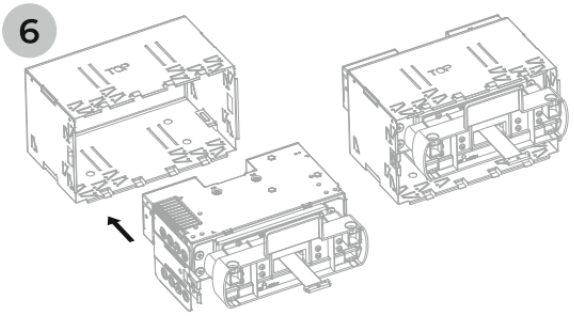


Install the metal frame to the car
and put the main unit inside the metal frame

7

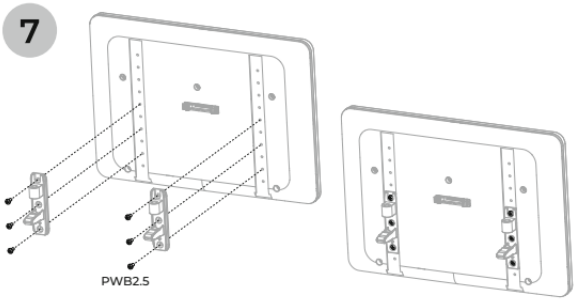

Put the display and the display holder together

8

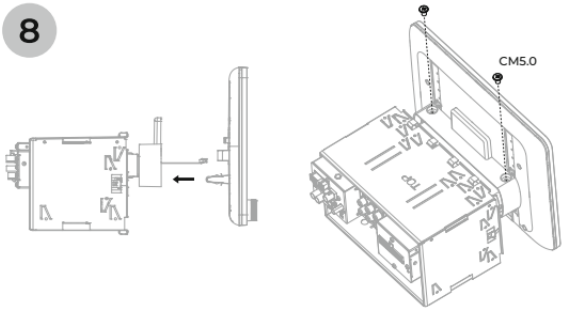

Install the radio main unit and fix the display