

Assembly Instructions (E)

01




02




Attach the bezel on the panel with screws, then connect the connection cable directly to the panel

03




Attach the metal bracket on the panel with screws

04




Connect the connection cable directly to the the headunit


05



The screen mounting bracket has several options to allow the installer to adjust the chassis height position. Please use the chassis position that best suits the installation application.



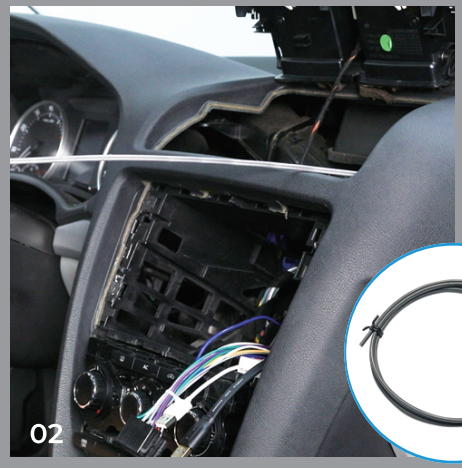

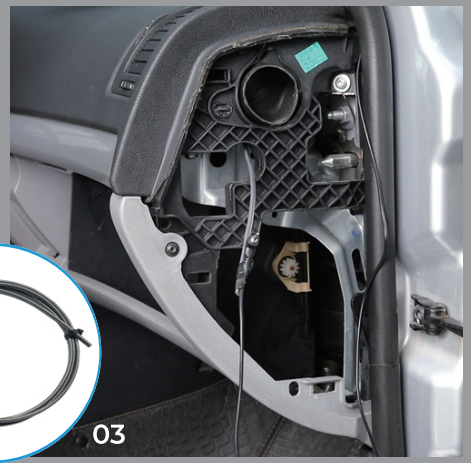



How to use fish tape?

Paneelin ja päälaitteen kokoaminen E

Valmistajan kuvat on säilytetty muuttamattomina. Panel tarkoittaa paneelia ja Bezel kehysosaa. Noudata oman sarjan muotoa ja kiinnityksiä; kuva ei korvaa auton purkuohjetta.

01. Kohdista paneeli ja kehysosa kuvan mukaan.

02. Kiinnitä kehysosa paneeliin ruuveilla PA3.0 × 8 ja kytke liitäntäkaapeli suoraan paneeliin.

03. Kiinnitä metallikiinnikkeet paneeliin ruuveilla PM2.5 × 5.

04. Kytke liitäntäkaapeli suoraan päälaitteeseen.

05. Näytön kiinnikkeen eri reiät mahdollistavat laiterungon korkeuden säätämisen. Valitse asennukseen parhaiten sopiva paikka ja kiinnitä kuvan mukaisilla ruuveilla PM5.0 × 6.

Vetojousen käyttö: 01 työnnä jousi sopivasta aukosta; 02 ohjaa se keskikonsolille; 03 kiinnitä vedettävä johto jouseen; 04 vedä johto varovasti paikalleen. Valokuvat näyttävät työtavan, eivät tietyn automallin purkujärjestystä.

AutoDIGI · info@autodigi.ee