

V9W / V10W Assembly Instruction

1

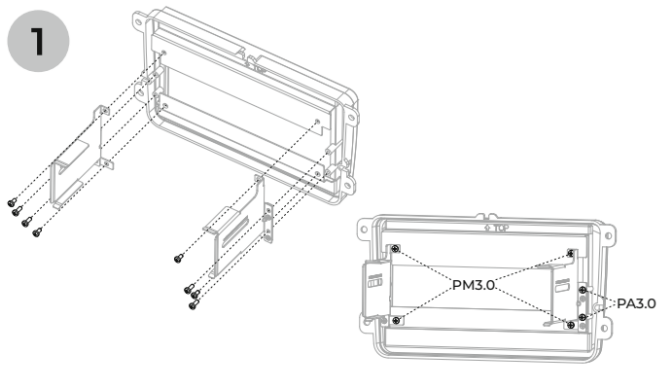


Put radio holder and bezel together

2

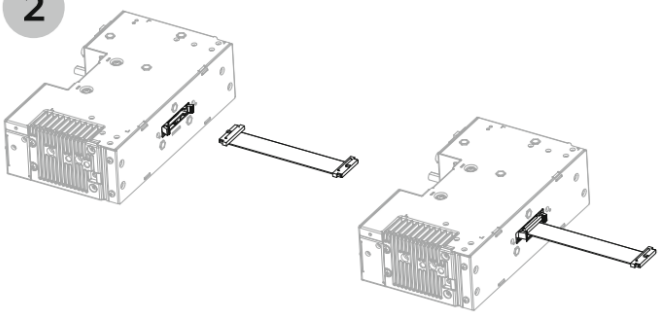


Connect the connection cable to the main unit

3

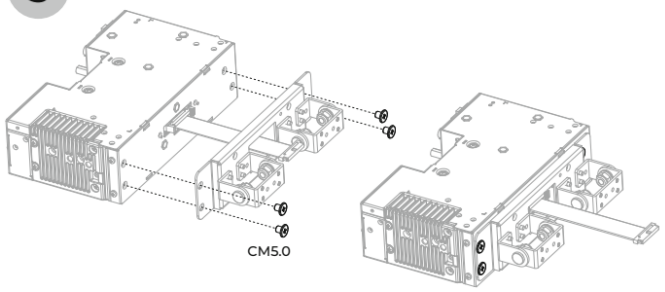


Put the main unit and rotary damper together

4

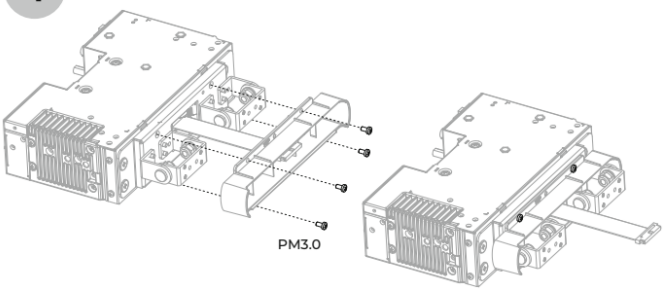


Put the main unit and rotary damper together

5

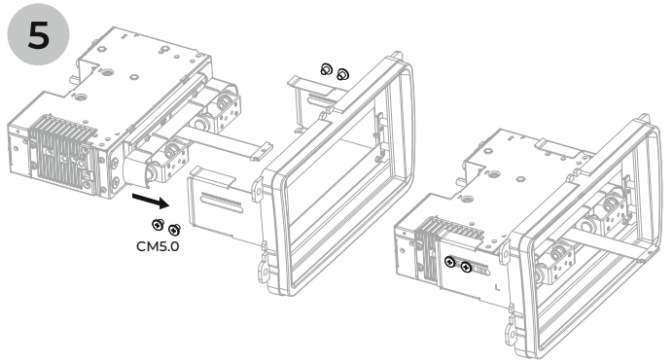


Put the main unit and the radio bezel together

6

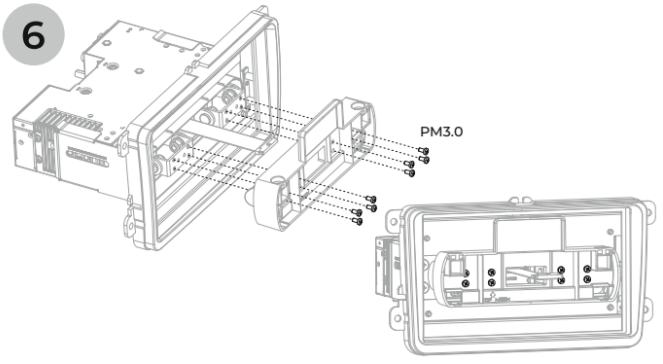


Put the radio main unit and monitor stand together

7

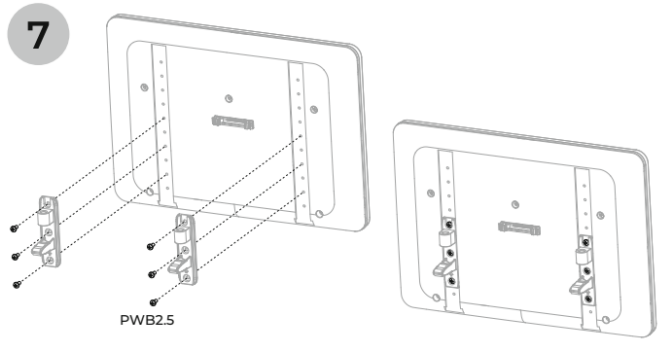

Put the display and the display holder together

8

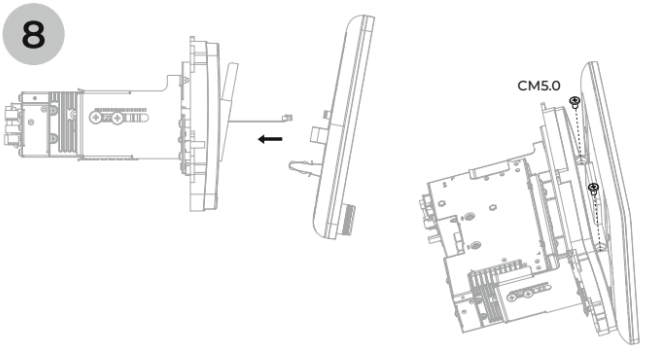

Install the radio main unit and fix the display

V9W / V10W — Assembly instructions

The diagram numbers correspond to the steps below. Use the screw type and size shown for each diagram, such as CM5.0, PM3.0 or PWB2.5. Original Car Screws means the vehicle’s original screws. The manufacturer diagrams are preserved unchanged.

1. Put the radio holder and bezel together.

2. Connect the connection cable to the main unit.

3. Assemble the main unit and rotary damper as illustrated.

4. Assemble the main unit and rotary damper as illustrated.

5. Put the main unit and radio bezel together.

6. Put the radio main unit and monitor stand together.

7. Put the display and display holder together.

8. Install the radio main unit and secure the display.