

V9W / V10W Assembly Instruction

1

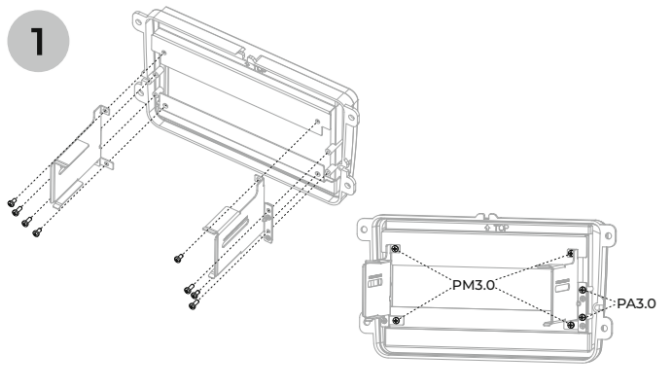


Put radio holder and bezel together

2

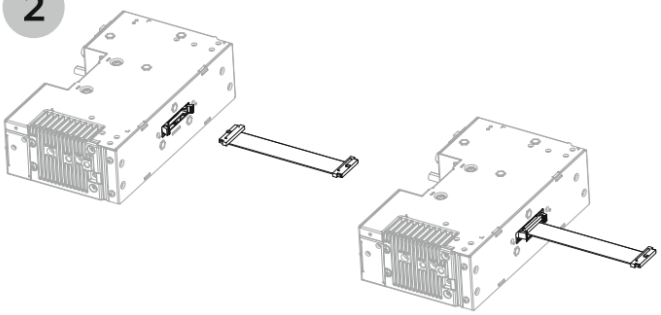


Connect the connection cable to the main unit

3

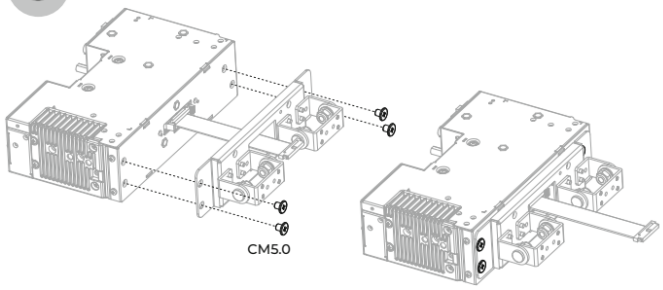


Put the main unit and rotary damper together

4

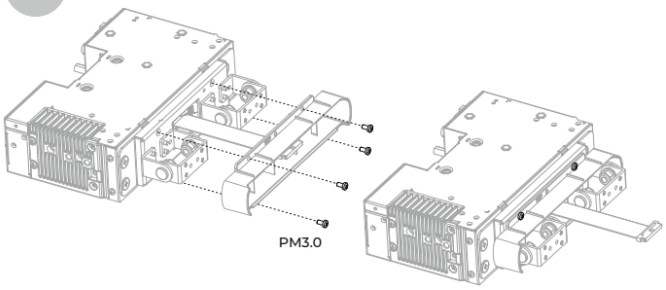


Put the main unit and rotary damper together

5

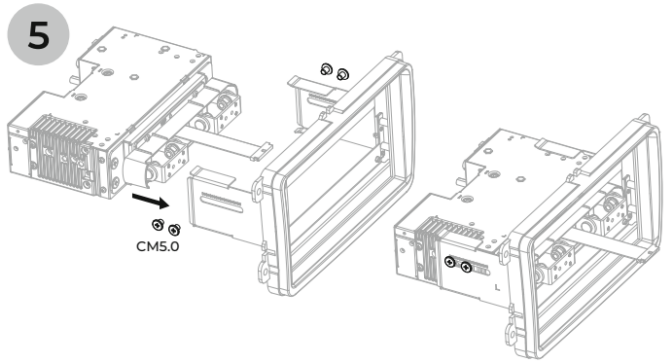


Put the main unit and the radio bezel together

6

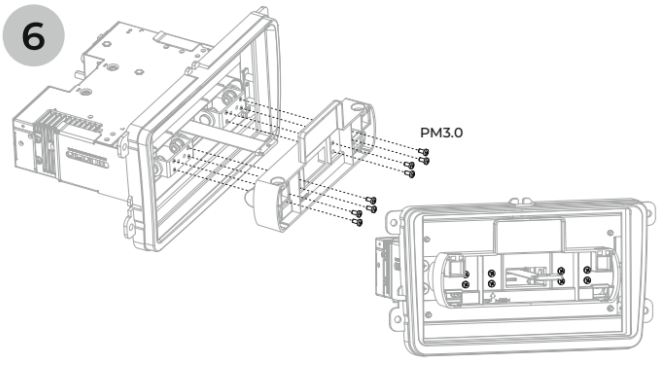


Put the radio main unit and monitor stand together

7

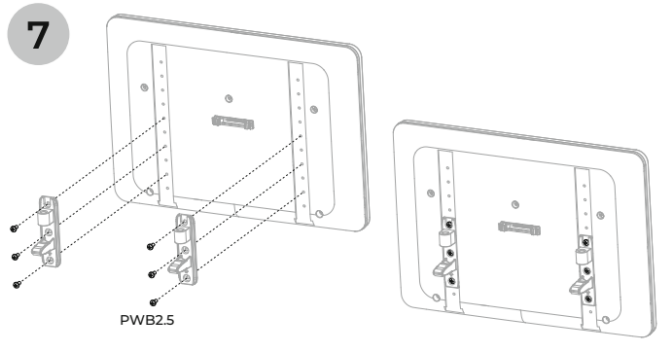

Put the display and the display holder together

8

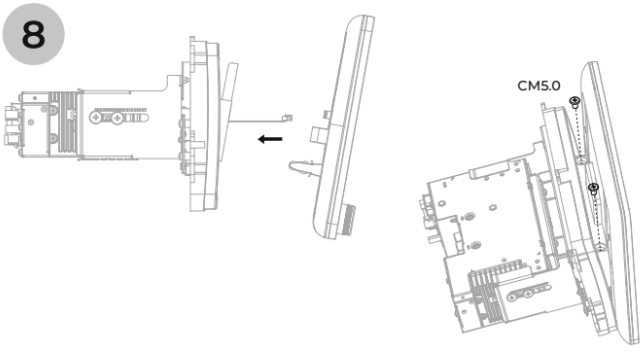

Install the radio main unit and fix the display

V9W / V10W — Paigaldusjuhend

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda raadio hoidik ja raamiosa.

2. Ühenda ühenduskaabel põhiseadmega.

3. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

4. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

5. Ühenda põhiseade ja raadioraam.

6. Ühenda raadio põhiseade ja ekraani tugikinnitus.

7. Kinnita ekraan ekraanihoidikule.

8. Paigalda raadio põhiseade ja kinnita ekraan.