

V9W / V10W Assembly Instruction

1

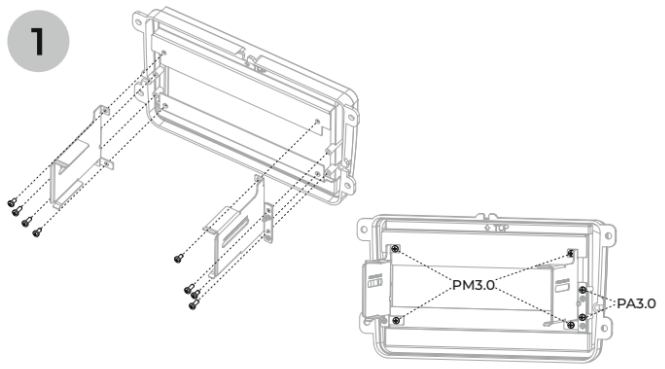


Put radio holder and bezel together

2

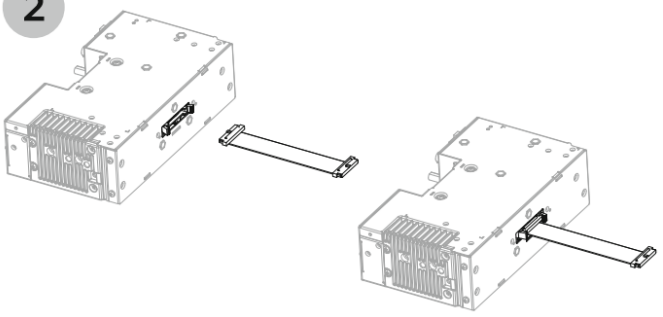


Connect the connection cable to the main unit

3

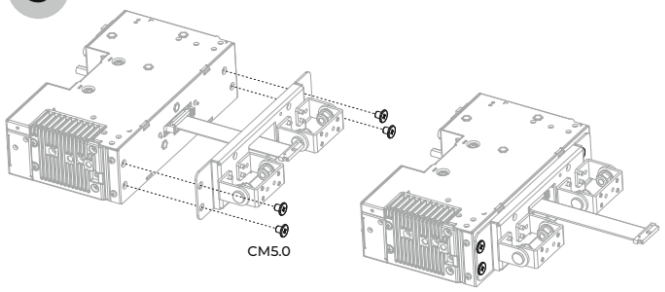


Put the main unit and rotary damper together

4

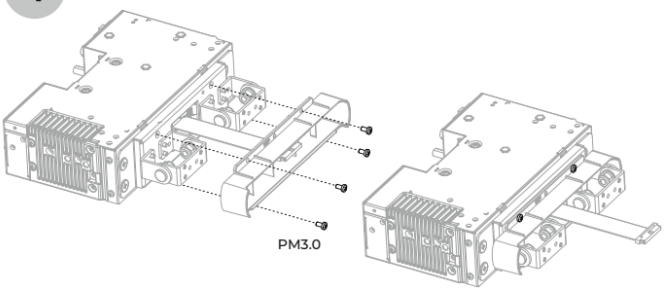


Put the main unit and rotary damper together

5

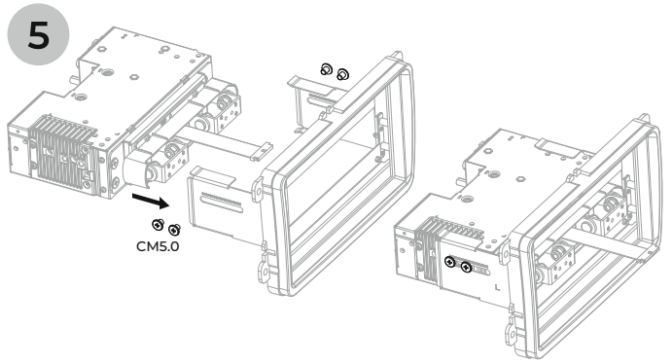


Put the main unit and the radio bezel together

6

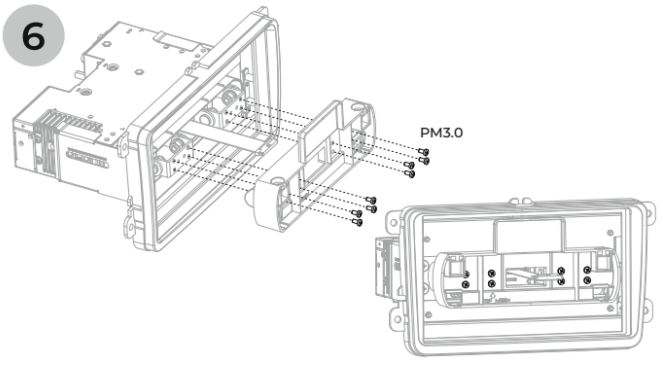


Put the radio main unit and monitor stand together

7

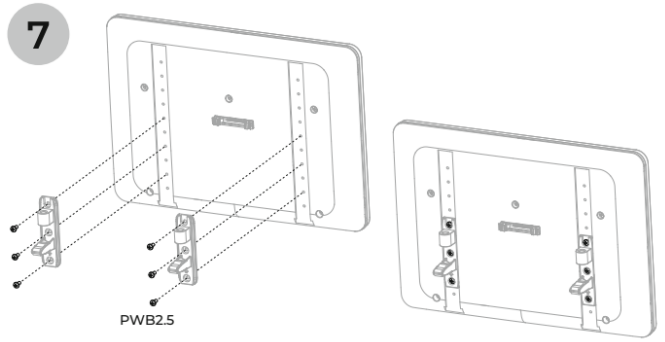

Put the display and the display holder together

8

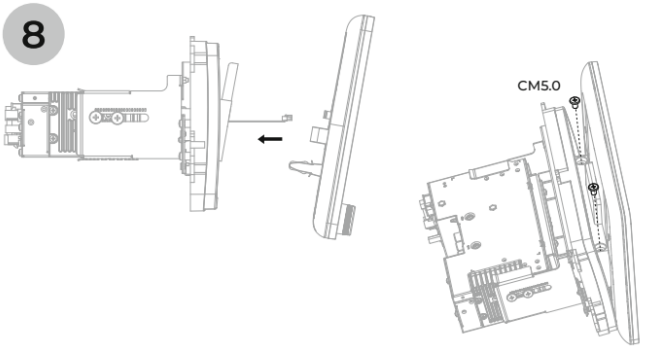

Install the radio main unit and fix the display

V9W / V10W — Asennusohje

Kuvien numerot vastaavat alla olevia vaiheita. Käytä kunkin kuvan yhteydessä ilmoitettua ruuvityyppiä ja kokoa (esimerkiksi CM5.0, PM3.0, PWB2.5). Original Car Screws tarkoittaa auton alkuperäisiä ruuveja. Valmistajan kuvat on säilytetty muuttamattomina.

1. Yhdistä radion pidike ja kehysosa.

2. Liitä yhdyskaapeli päälaitteeseen.

3. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

4. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

5. Yhdistä päälaite ja radiokehys.

6. Yhdistä päälaite ja näytön tukikiinnike.

7. Kiinnitä näyttö näytön pidikkeeseen.

8. Asenna radion päälaite ja kiinnitä näyttö.