

KG21 Assembly Instruction

1

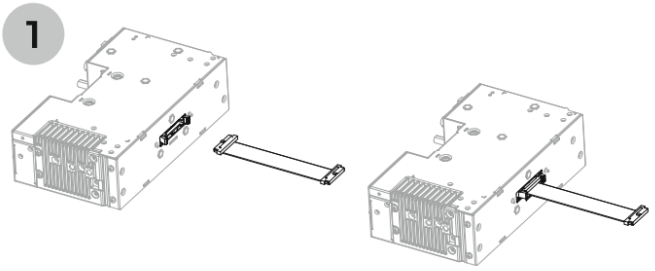


Connect the connection cable to the main unit

2

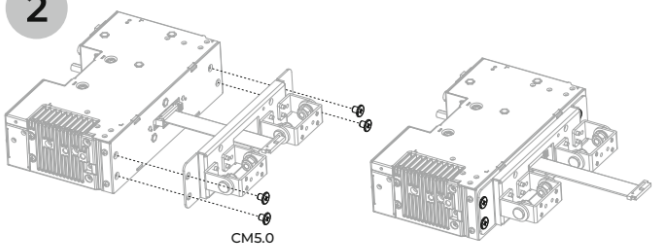


Put the main unit and rotary damper together

3

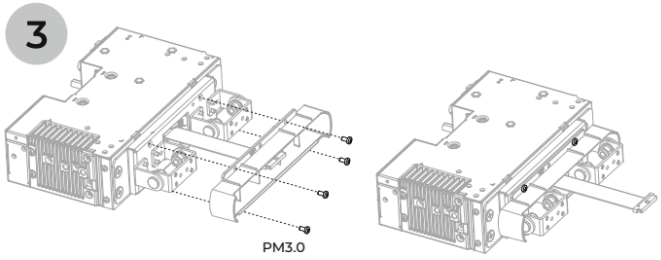


Put the main unit and rotary damper together

4

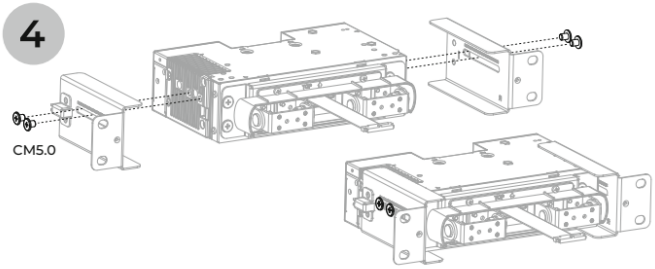


Put the main unit and mounting plates together

5

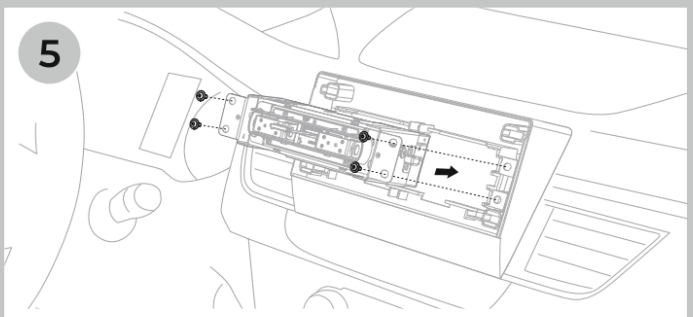


Put the main unit and the original radio bezel together

6

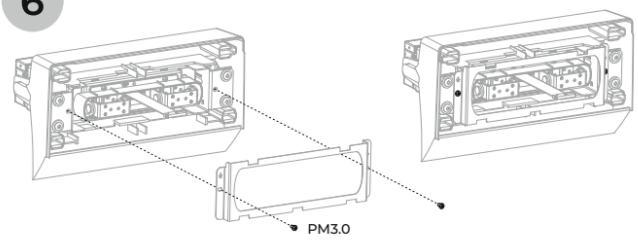


Put the main unit and the metal plate together

7

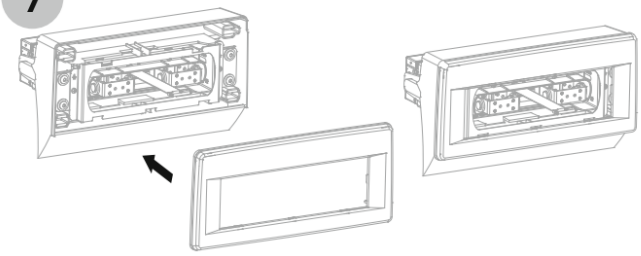


Put the main unit and the original radio bezel together

8

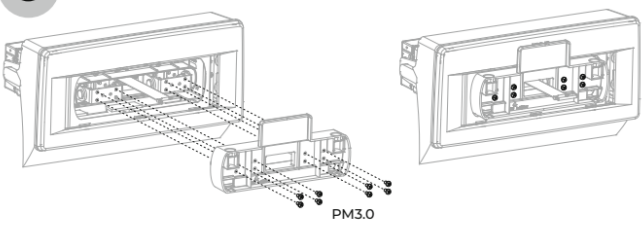


Put the radio main unit and monitor stand together

9

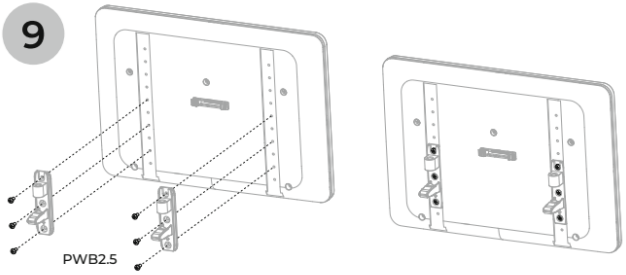

Put the display and the display holder together

10

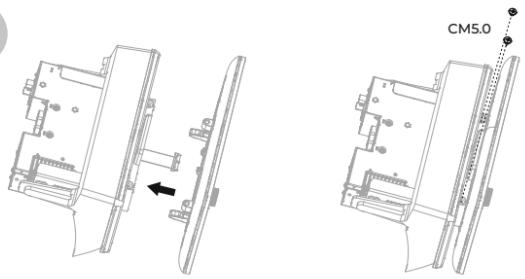

Install the radio main unit and fix the display

KG21 — Paigaldusjuhend

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda ühenduskaabel põhiseadmega.

2. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

3. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

4. Ühenda põhiseade ja paigaldusplaadid.

5. Ühenda põhiseade ja auto originaalne raadioraam.

6. Ühenda põhiseade ja metallplaat.

7. Ühenda põhiseade ja auto originaalne raadioraam.

8. Ühenda raadio põhiseade ja ekraani tugikinnitus.

9. Kinnita ekraan ekraanihoidikule.

10. Paigalda raadio põhiseade ja kinnita ekraan.