

KG21 Assembly Instruction

1

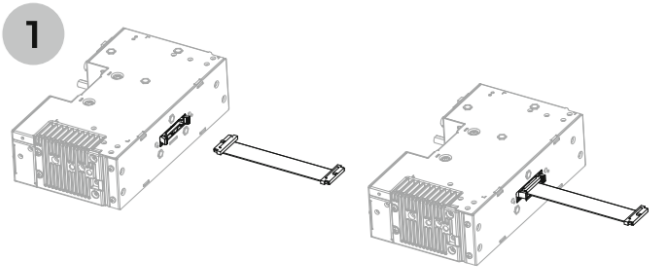


Connect the connection cable to the main unit

2

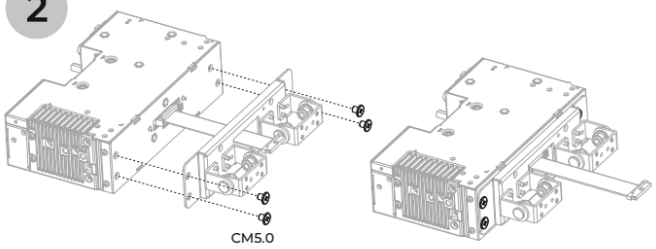


Put the main unit and rotary damper together

3

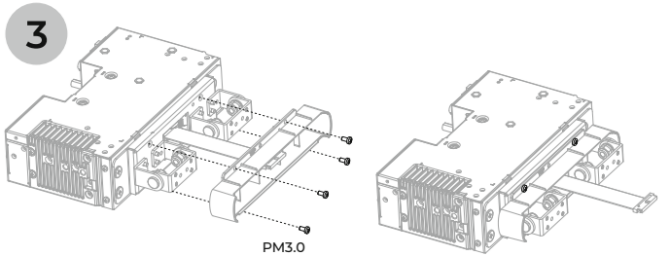


Put the main unit and rotary damper together

4

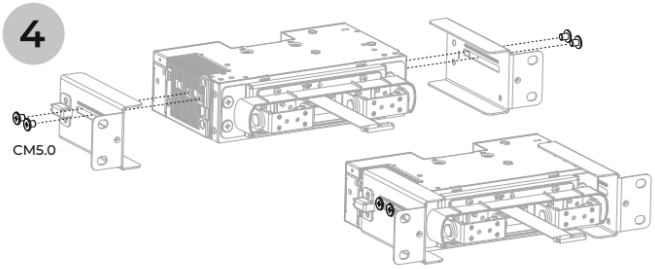


Put the main unit and mounting plates together

5

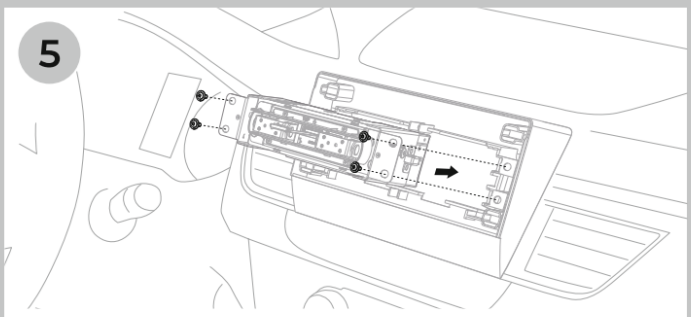


Put the main unit and the original radio bezel together

6

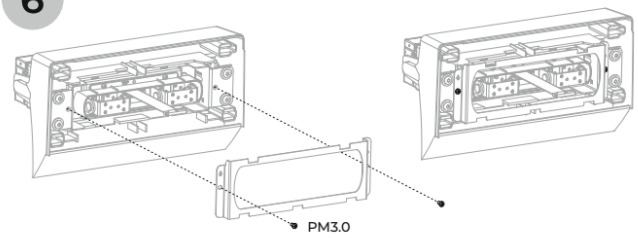


Put the main unit and the metal plate together

7

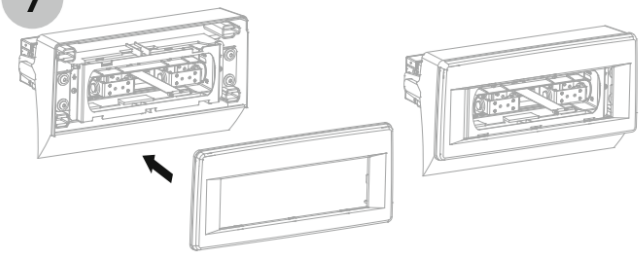


Put the main unit and the original radio bezel together

8

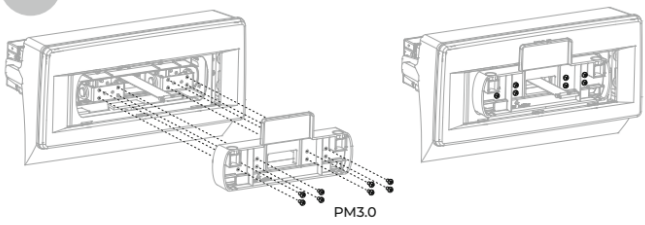


Put the radio main unit and monitor stand together

9

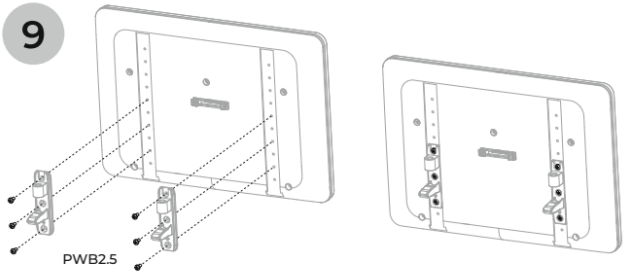

Put the display and the display holder together

10

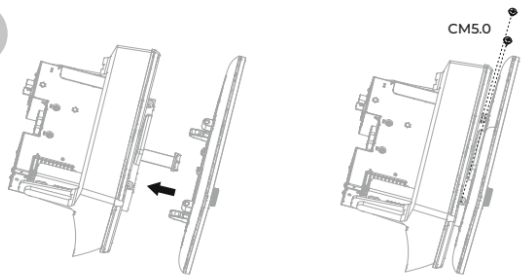

Install the radio main unit and fix the display

KG21 — Asennusohje

Kuvien numerot vastaavat alla olevia vaiheita. Käytä kunkin kuvan yhteydessä ilmoitettua ruuvityyppiä ja kokoa (esimerkiksi CM5.0, PM3.0, PWB2.5). Original Car Screws tarkoittaa auton alkuperäisiä ruuveja. Valmistajan kuvat on säilytetty muuttamattomina.

1. Liitä yhdyskaapeli päälaitteeseen.

2. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

3. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

4. Yhdistä päälaite ja asennuslevyt.

5. Yhdistä päälaite ja auton alkuperäinen radiokehys.

6. Yhdistä päälaite ja metallilevy.

7. Yhdistä päälaite ja auton alkuperäinen radiokehys.

8. Yhdistä päälaite ja näytön tukikiinnike.

9. Kiinnitä näyttö näytön pidikkeeseen.

10. Asenna radion päälaite ja kiinnitä näyttö.