

KG21 Assembly Instruction

1

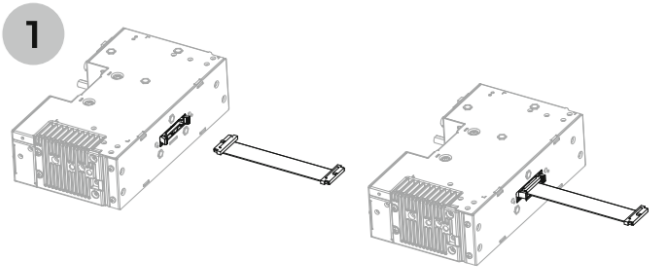


Connect the connection cable to the main unit

2

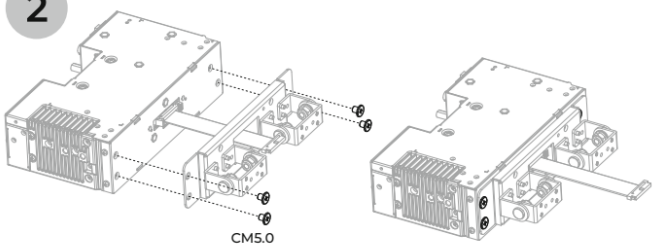


Put the main unit and rotary damper together

3

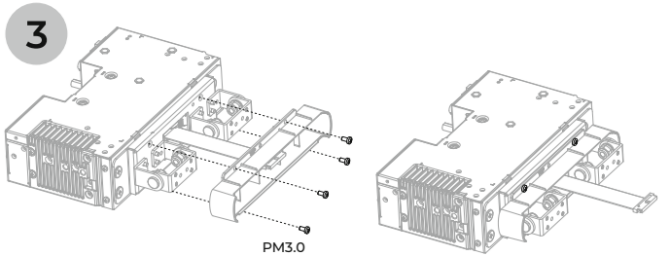


Put the main unit and rotary damper together

4

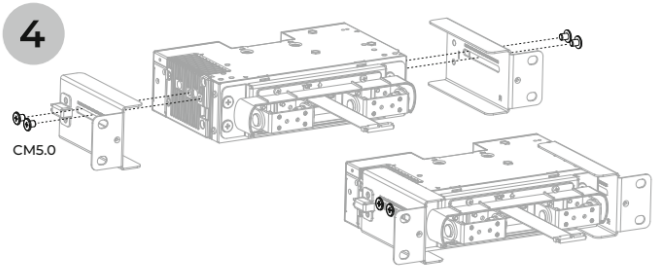


Put the main unit and mounting plates together

5

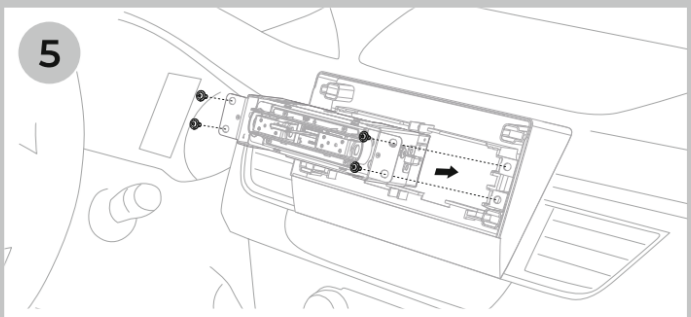


Put the main unit and the original radio bezel together

6

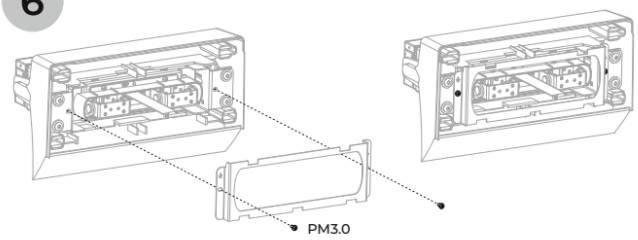


Put the main unit and the metal plate together

7

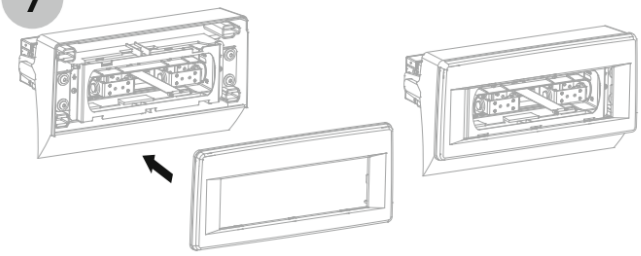


Put the main unit and the original radio bezel together

8

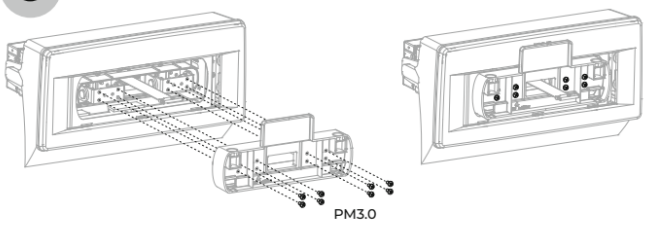


Put the radio main unit and monitor stand together

9

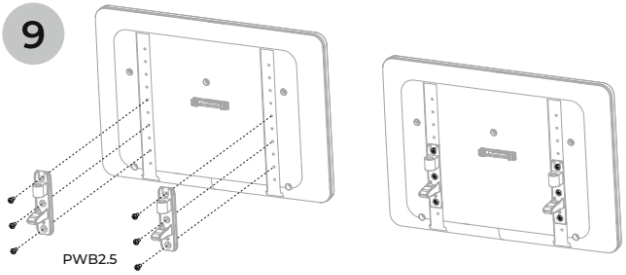

Put the display and the display holder together

10

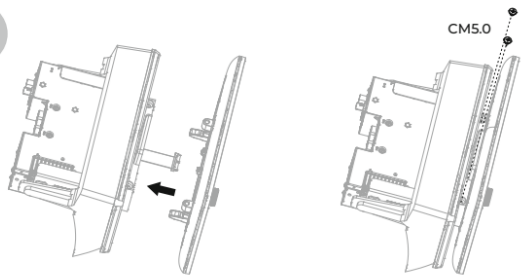

Install the radio main unit and fix the display

KG21 — Инструкция по монтажу

Номера рисунков соответствуют этапам ниже. Используйте тип и размер винтов, указанные на соответствующем рисунке, например CM5.0, PM3.0 или PWB2.5. Original Car Screws означает штатные винты автомобиля. Иллюстрации производителя сохранены без изменений.

1. Подключите соединительный кабель к головному устройству.

2. Соедините головное устройство и поворотный демпфер по рисунку.

3. Соедините головное устройство и поворотный демпфер по рисунку.

4. Соедините головное устройство и монтажные пластины.

5. Соедините головное устройство и штатную рамку магнитолы.

6. Соедините головное устройство и металлическую пластину.

7. Соедините головное устройство и штатную рамку магнитолы.

8. Соедините радиоблок и опору дисплея.

9. Соедините дисплей и держатель дисплея.

10. Установите радиоблок и закрепите дисплей.