

RNCL5 Assembly Instruction
For vehicle without LCD display

1

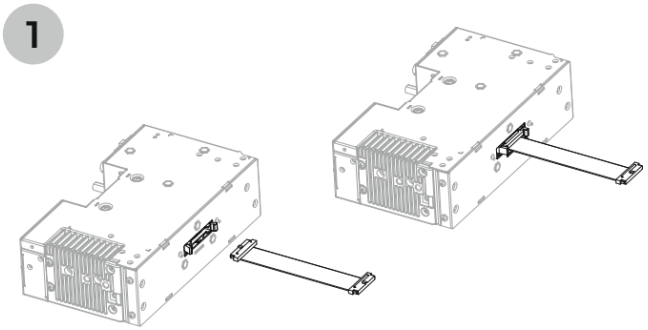


Connect the connection cable to the main unit

2

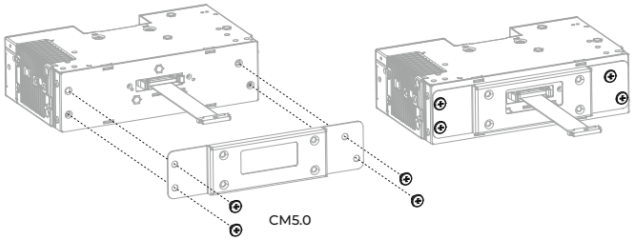


Put the main unit and the metal plate together

3

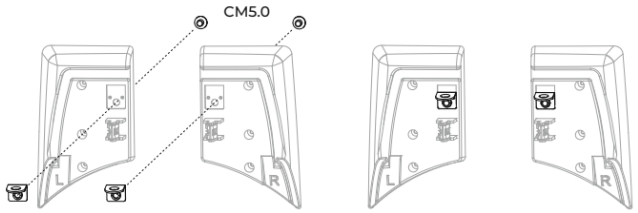


4

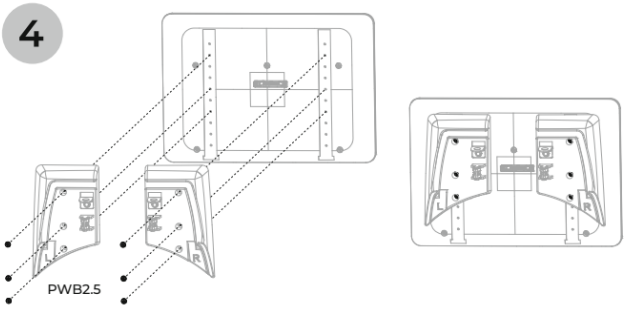


Put the display and the display holder together

5

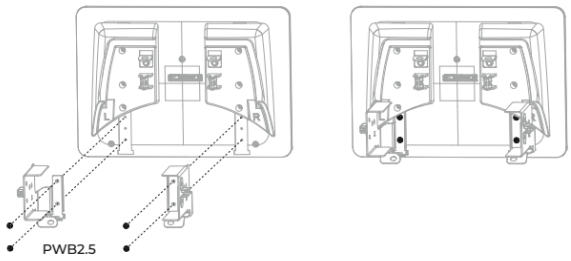


Put the display and the display holder together

6

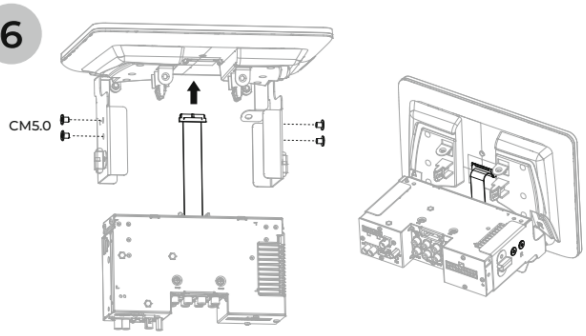


Put the display and main unit together

7

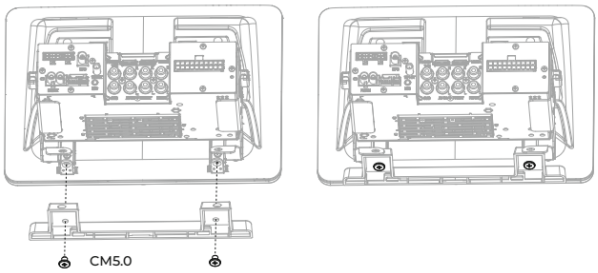

Put the mounting bracket and display together

8

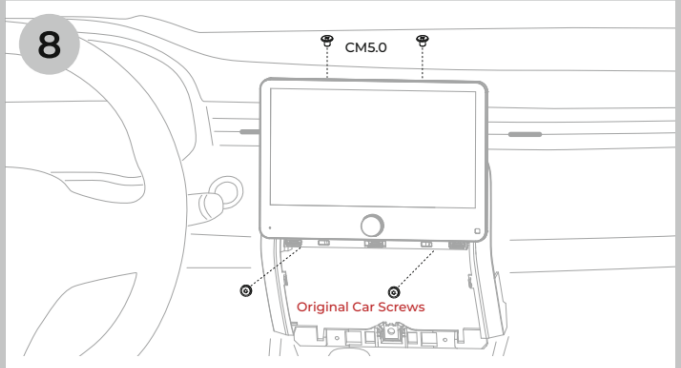

Fix the Dynavin radio to finish installation

RNCL5(unit combined) — Assembly instructions

For a vehicle without a factory LCD display.

The diagram numbers correspond to the steps below. Use the screw type and size shown for each diagram, such as CM5.0, PM3.0 or PWB2.5. Original Car Screws means the vehicle’s original screws. The manufacturer diagrams are preserved unchanged.

1. Connect the connection cable to the main unit.

2. Put the main unit and metal plate together.

3. Put the display and display holder together.

4. Put the display and display holder together.

5. Put the display and display holder together.

6. Put the display and main unit together.

7. Put the mounting bracket and display together.

8. Secure the Dynavin radio to finish the installation.