

RNCL5 Assembly Instruction
For vehicle without LCD display

1

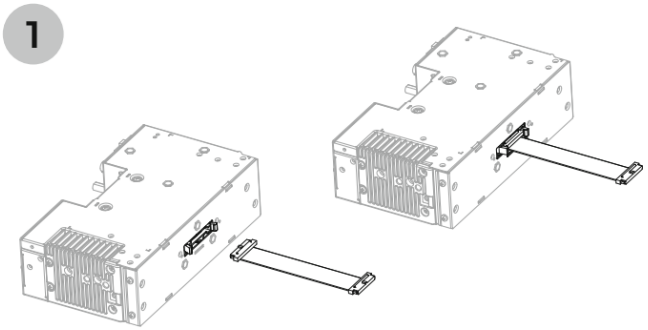


Connect the connection cable to the main unit

2

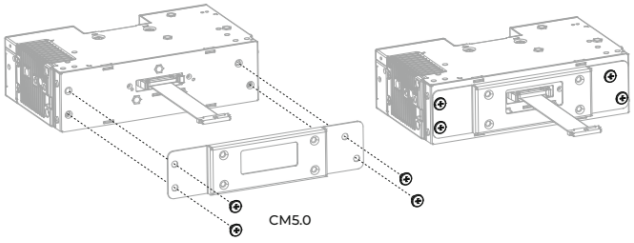


Put the main unit and the metal plate together

3

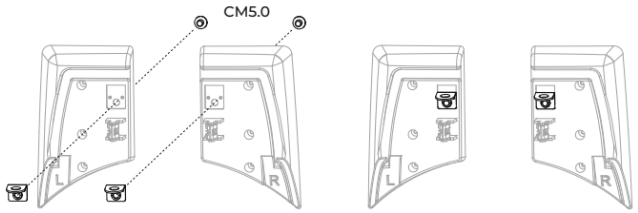


4

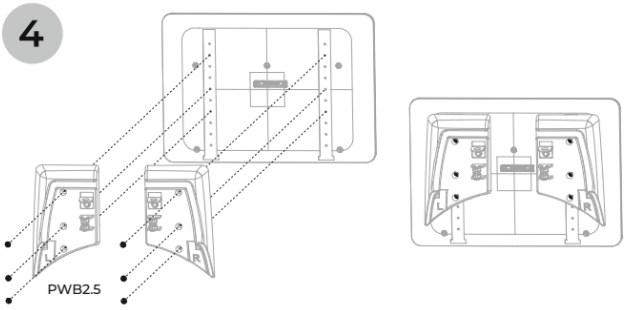


Put the display and the display holder together

5

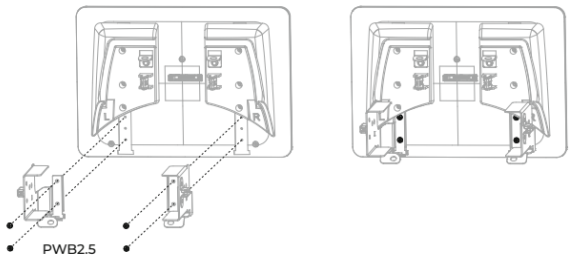


Put the display and the display holder together

6

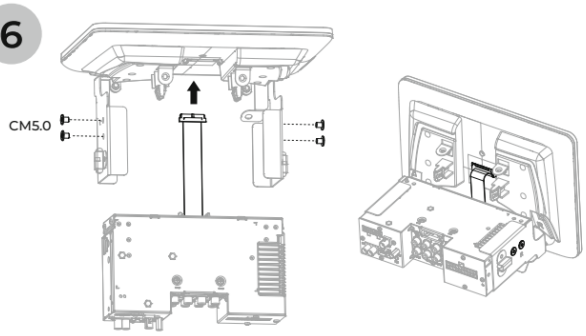


Put the display and main unit together

7

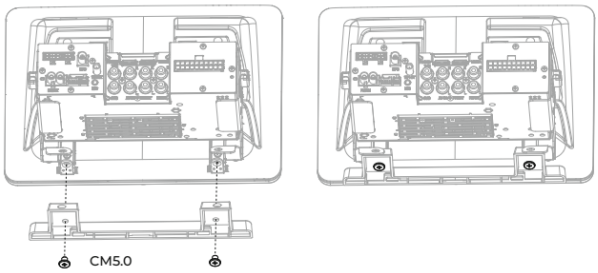

Put the mounting bracket and display together

8

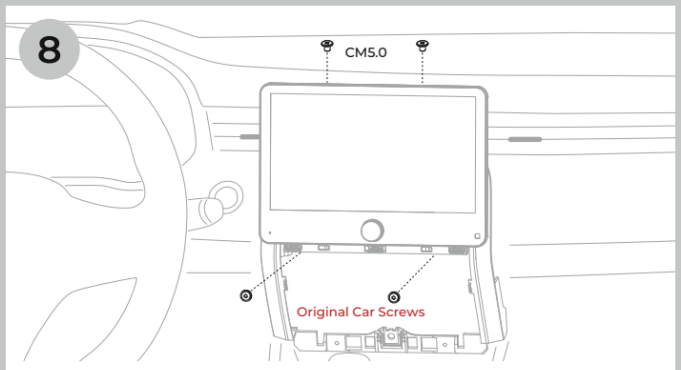

Fix the Dynavin radio to finish installation

RNCL5(unit combined) — Paigaldusjuhend

Ilma tehase LCD-ekraanita autole.

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda ühenduskaabel põhiseadmega.

2. Ühenda põhiseade ja metallplaat.

3. Kinnita ekraan ekraanihoidikule.

4. Kinnita ekraan ekraanihoidikule.

5. Kinnita ekraan ekraanihoidikule.

6. Ühenda ekraan ja põhiseade.

7. Ühenda paigalduskronstein ja ekraan.

8. Paigaldamise lõpetamiseks kinnita Dynavini raadio.