

RNCL5 Assembly Instruction
For vehicle without LCD display

1

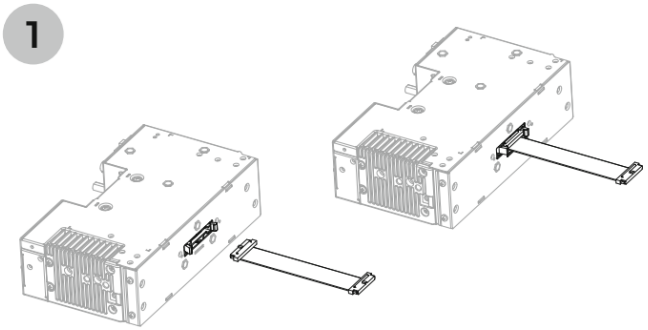


Connect the connection cable to the main unit

2

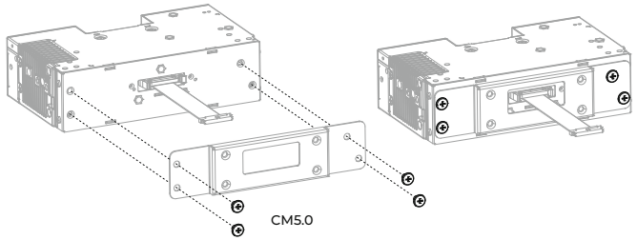


Put the main unit and the metal plate together

3

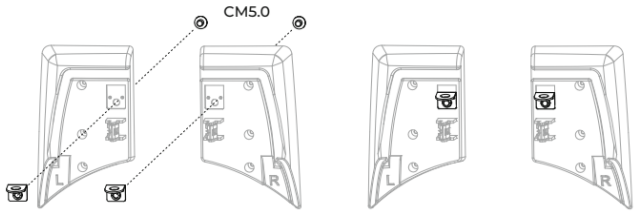


4

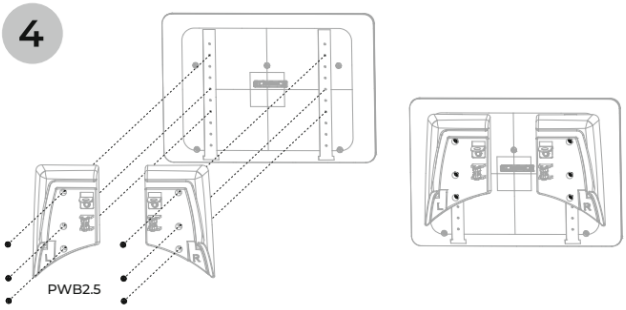


Put the display and the display holder together

5

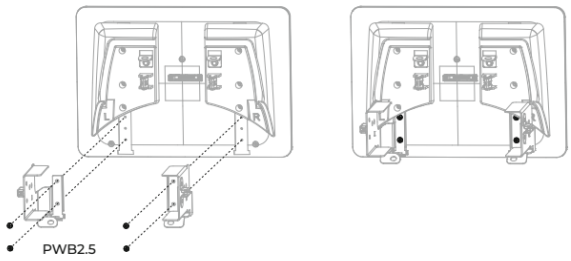


Put the display and the display holder together

6

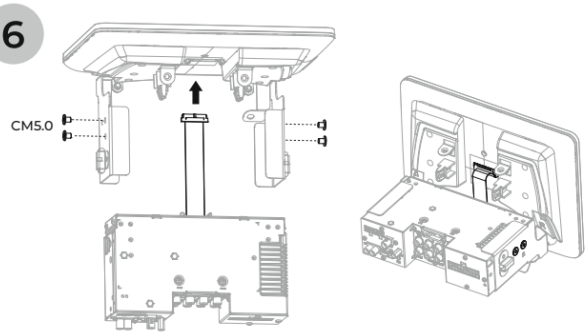


Put the display and main unit together

7

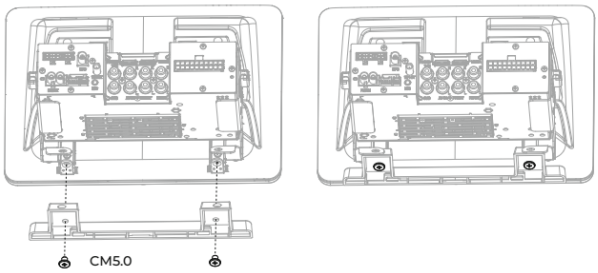

Put the mounting bracket and display together

8

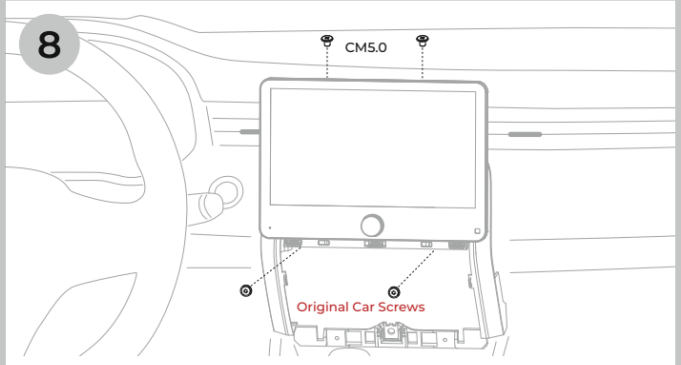

Fix the Dynavin radio to finish installation

RNCL5(unit combined) — Инструкция по монтажу

Для автомобиля без штатного LCD-дисплея.

Номера рисунков соответствуют этапам ниже. Используйте тип и размер винтов, указанные на соответствующем рисунке, например CM5.0, PM3.0 или PWB2.5. Original Car Screws означает штатные винты автомобиля. Иллюстрации производителя сохранены без изменений.

1. Подключите соединительный кабель к головному устройству.

2. Соедините головное устройство и металлическую пластину.

3. Соедините дисплей и держатель дисплея.

4. Соедините дисплей и держатель дисплея.

5. Соедините дисплей и держатель дисплея.

6. Соедините дисплей и головное устройство.

7. Соедините монтажный кронштейн и дисплей.

8. Закрепите магнитолу Dynavin для завершения установки.