

RNCL5 Assembly Instruction
For vehicle with LCD display

1

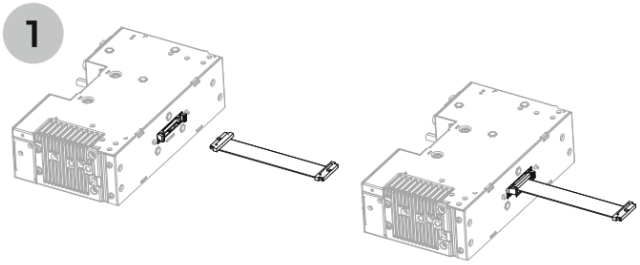


Connect the connection cable to the main unit

2

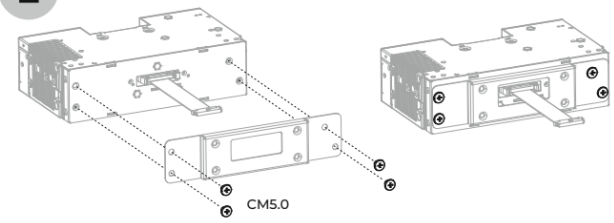


Put the main unit and the metal plate together

3

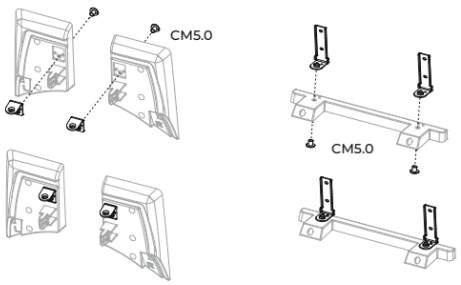


4

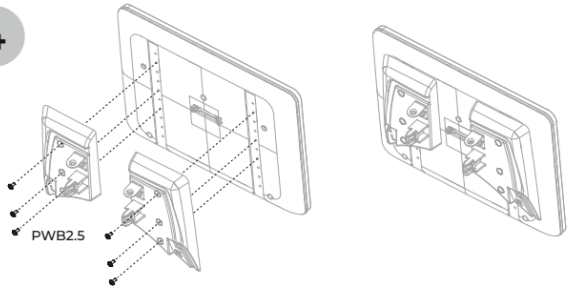


Put the display and the display holder together

5

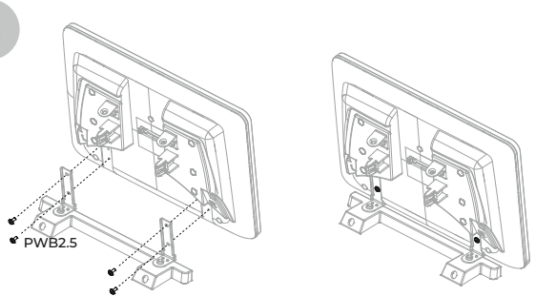


6

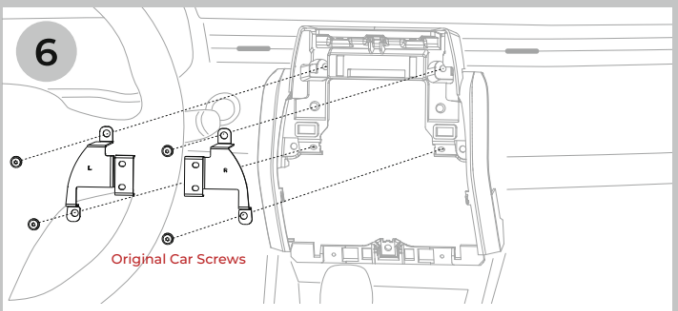


Put the mounting plates and the original bezel together

7

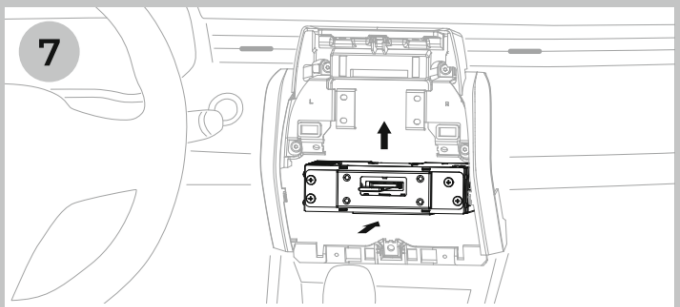


Put the main unit and the original bezel together

8

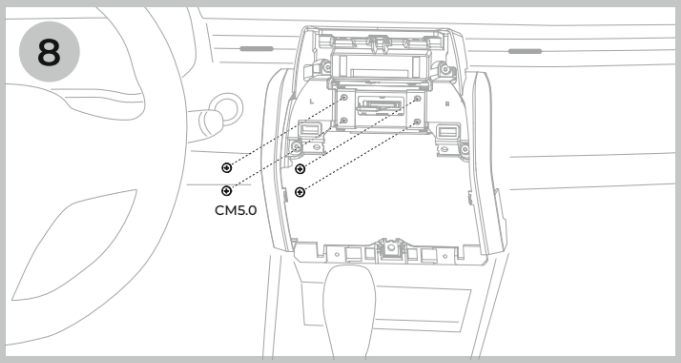


9

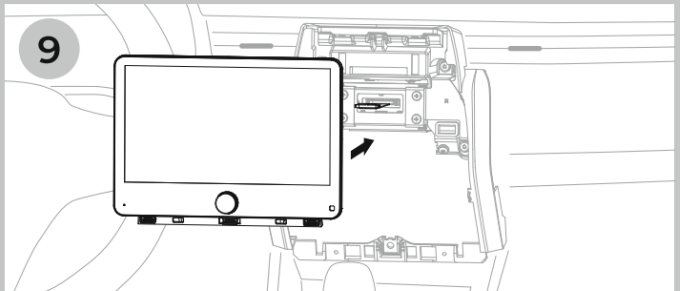

Connect the connection cable to the display

10

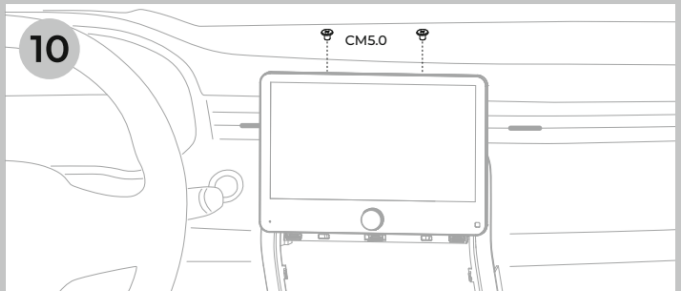

Fix the display to finish installation

RNCL5(unit separated) — Assembly instructions

For a vehicle with a factory LCD display.

The diagram numbers correspond to the steps below. Use the screw type and size shown for each diagram, such as CM5.0, PM3.0 or PWB2.5. Original Car Screws means the vehicle’s original screws. The manufacturer diagrams are preserved unchanged.

1. Connect the connection cable to the main unit.

2. Put the main unit and metal plate together.

3. Put the display and display holder together.

4. Put the display and display holder together.

5. Put the mounting plates and original bezel together.

6. Put the mounting plates and original bezel together.

7. Put the main unit and original radio bezel together.

8. Put the main unit and original radio bezel together.

9. Connect the connection cable to the display.

10. Secure the display to finish the installation.