

RNCL5 Assembly Instruction
For vehicle with LCD display

1

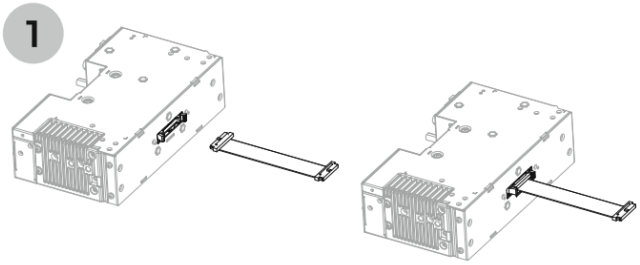


Connect the connection cable to the main unit

2

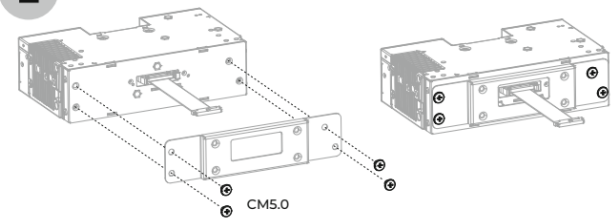


Put the main unit and the metal plate together

3

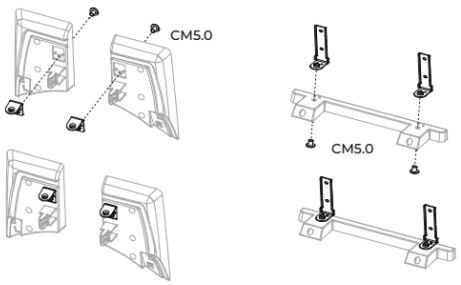


4

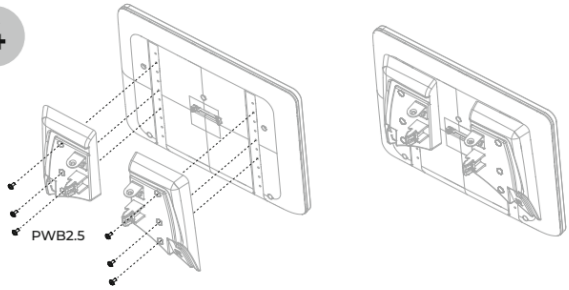


Put the display and the display holder together

5

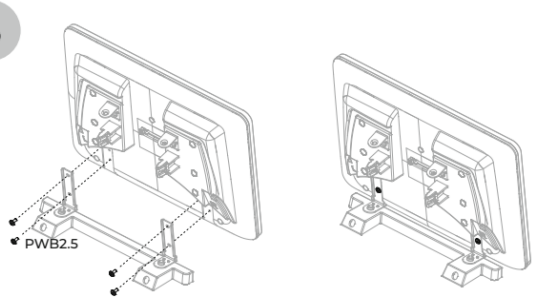


6

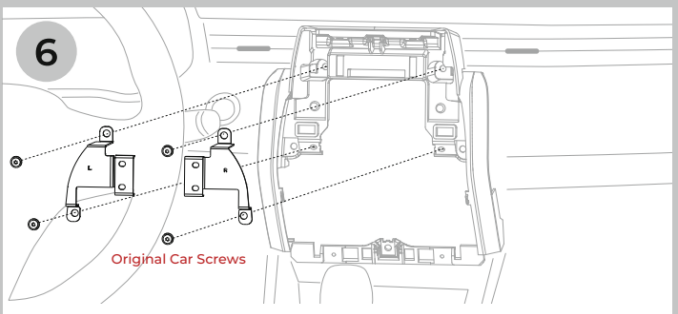


Put the mounting plates and the original bezel together

7

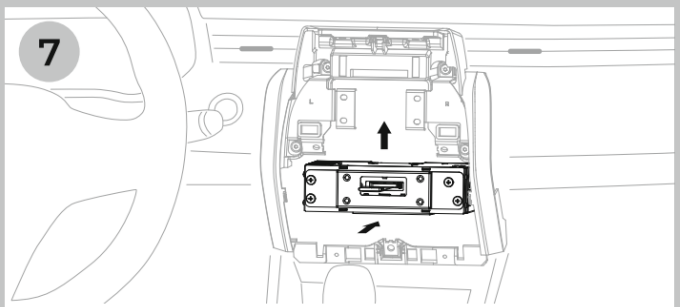


Put the main unit and the original bezel together

8

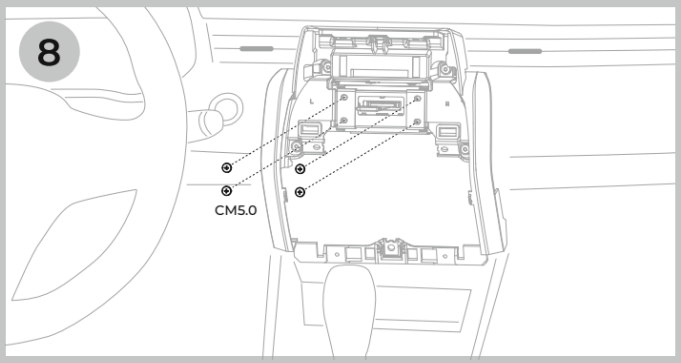


9

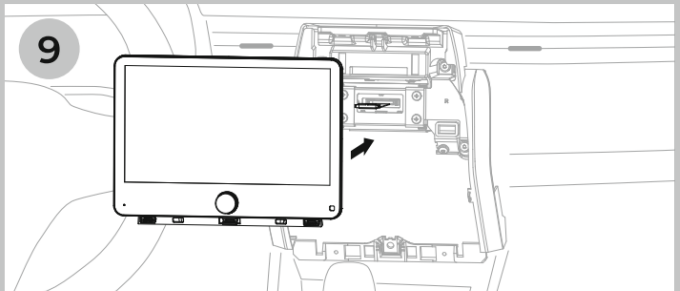

Connect the connection cable to the display

10

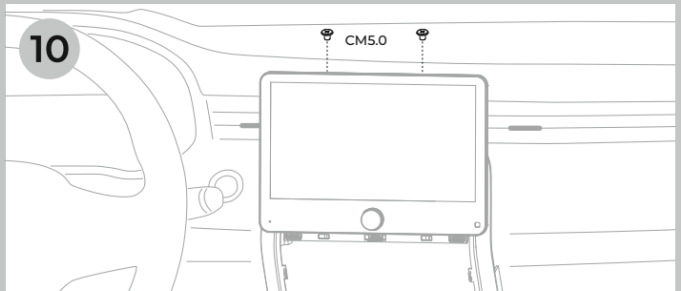

Fix the display to finish installation

RNCL5(unit separated) — Paigaldusjuhend

Tehase LCD-ekraaniga autole.

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda ühenduskaabel põhiseadmega.

2. Ühenda põhiseade ja metallplaat.

3. Kinnita ekraan ekraanihoidikule.

4. Kinnita ekraan ekraanihoidikule.

5. Ühenda paigaldusplaadid ja originaalraam.

6. Ühenda paigaldusplaadid ja originaalraam.

7. Ühenda põhiseade ja auto originaalne raadioraam.

8. Ühenda põhiseade ja auto originaalne raadioraam.

9. Ühenda ühenduskaabel ekraaniga.

10. Paigaldamise lõpetamiseks kinnita ekraan.