

# RNCL5 Assembly Instruction
## For vehicle with LCD display

1

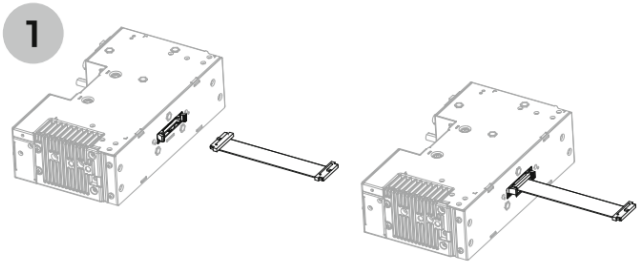


Connect the connection cable to the main unit

2

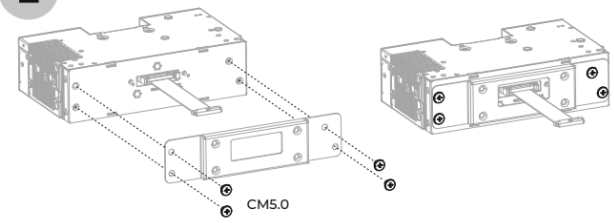



Put the main unit and the metal plate together

3

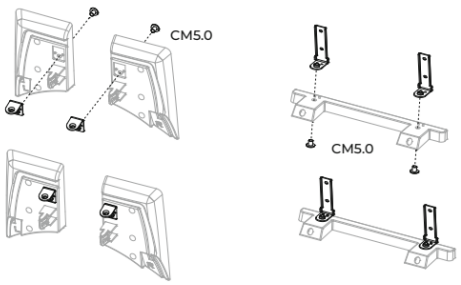



4

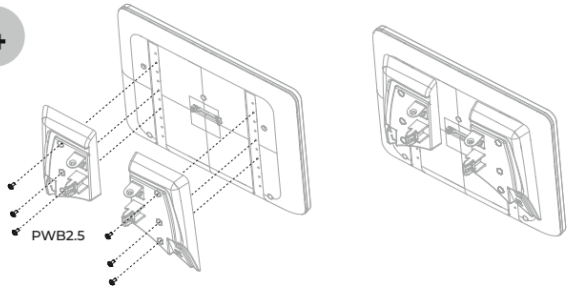



Put the display and the display holder together

5

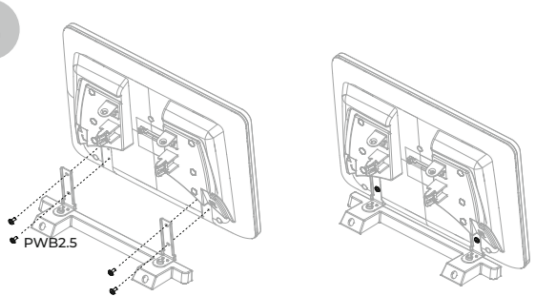



6

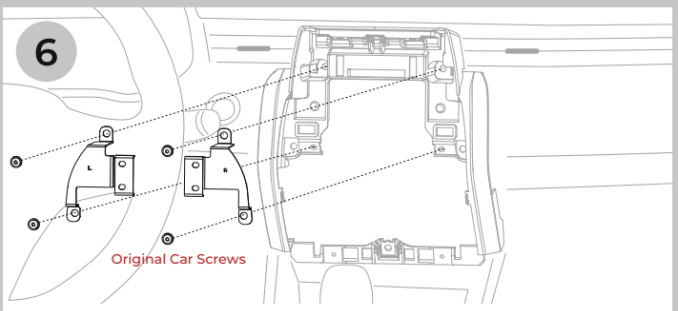



Put the mounting plates and the original bezel together

7

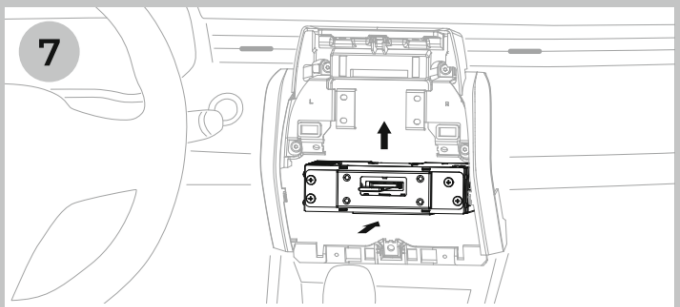


Put the main unit and the original bezel together

8

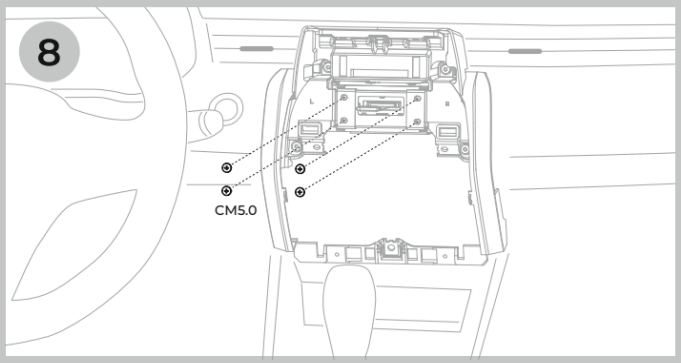



9

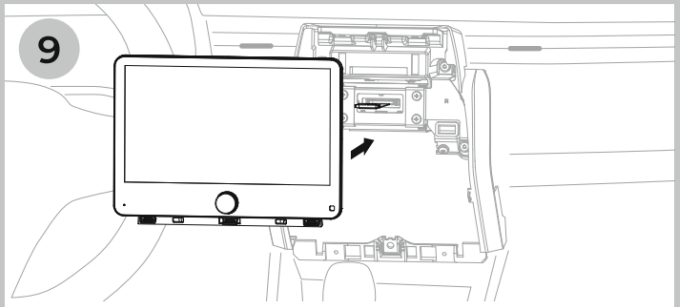

Connect the connection cable to the display

10

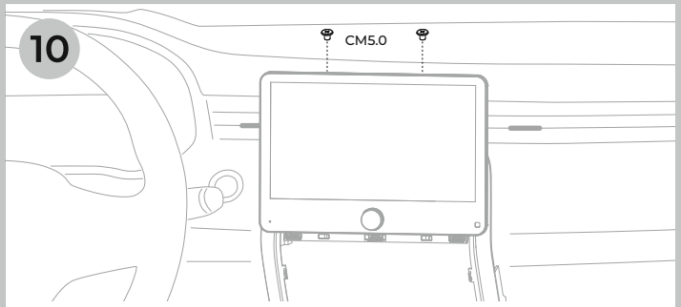


Fix the display to finish installation

# RNCL5(unit separated) — Asennusohje

Autoon, jossa on tehtaan LCD-näyttö.

Kuvien numerot vastaavat alla olevia vaiheita. Käytä kunkin kuvan yhteydessä ilmoitettua ruuvityyppiä ja kokoa (esimerkiksi CM5.0, PM3.0, PWB2.5). Original Car Screws tarkoittaa auton alkuperäisiä ruuveja. Valmistajan kuvat on säilytetty muuttamattomina.

1. Liitä yhdyskaapeli päälaitteeseen.

2. Yhdistä päälaite ja metallilevy.

3. Kiinnitä näyttö näytön pidikkeeseen.

4. Kiinnitä näyttö näytön pidikkeeseen.

5. Yhdistä asennuslevyt ja alkuperäinen kehys.

6. Yhdistä asennuslevyt ja alkuperäinen kehys.

7. Yhdistä päälaite ja auton alkuperäinen radiokehys.

8. Yhdistä päälaite ja auton alkuperäinen radiokehys.

9. Liitä yhdyskaapeli näyttöön.

10. Kiinnitä näyttö asennuksen viimeistelemiseksi.