

RNCL5 Assembly Instruction
For vehicle with LCD display

1

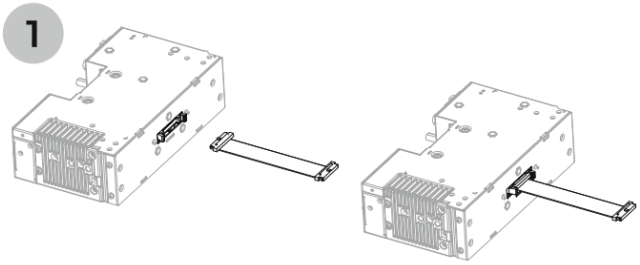


Connect the connection cable to the main unit

2

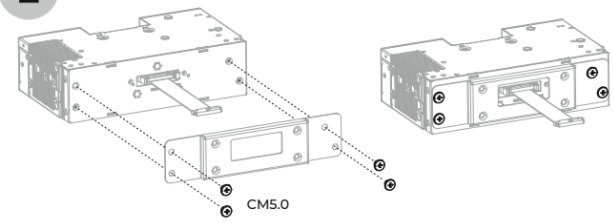


Put the main unit and the metal plate together

3

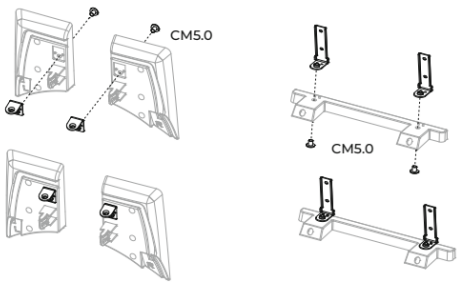


4

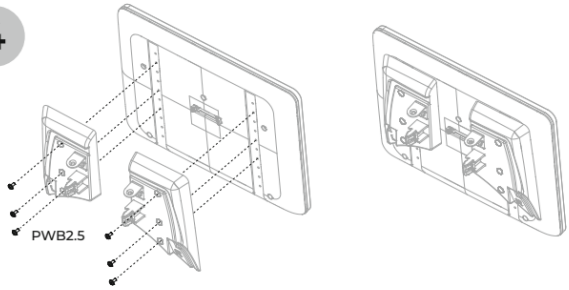


Put the display and the display holder together

5

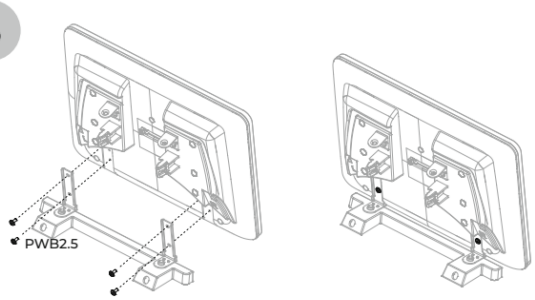


6

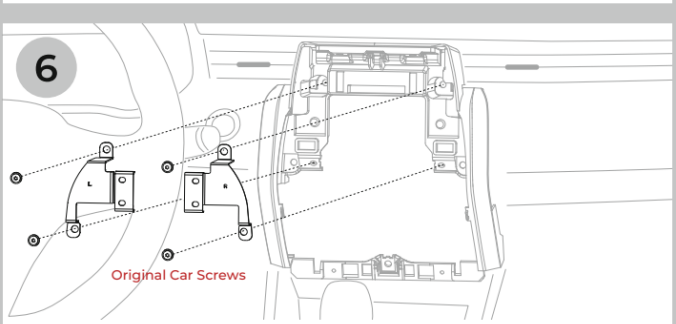


Put the mounting plates and the original bezel together

7

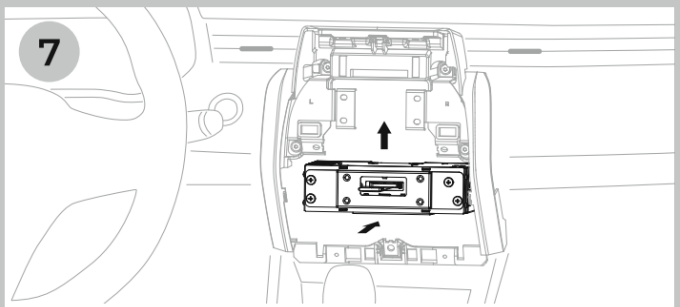


Put the main unit and the original bezel together

8

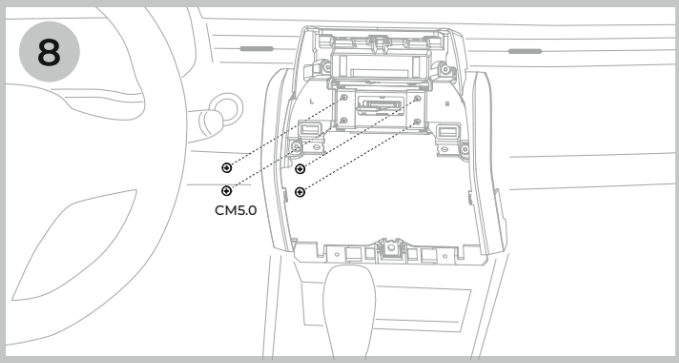


9

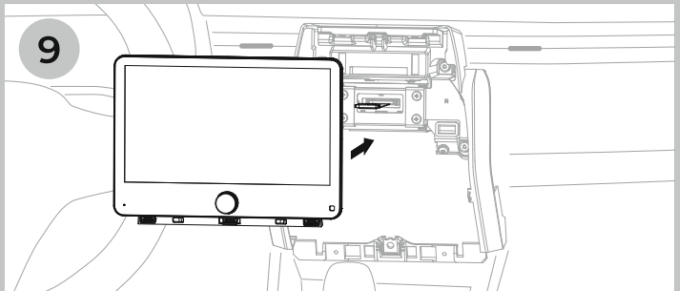

Connect the connection cable to the display

10

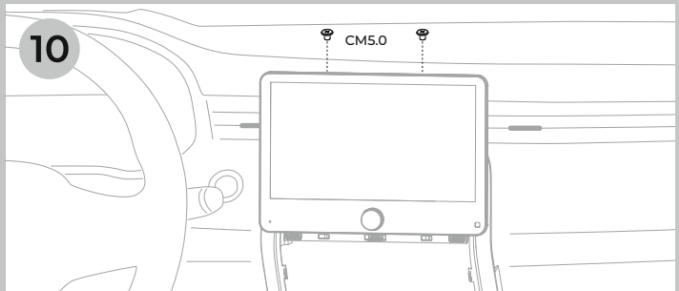

Fix the display to finish installation

RNCL5(unit separated) — Инструкция по монтажу

Для автомобиля со штатным LCD-дисплеем.

Номера рисунков соответствуют этапам ниже. Используйте тип и размер винтов, указанные на соответствующем рисунке, например CM5.0, PM3.0 или PWB2.5. Original Car Screws означает штатные винты автомобиля. Иллюстрации производителя сохранены без изменений.

1. Подключите соединительный кабель к головному устройству.

2. Соедините головное устройство и металлическую пластину.

3. Соедините дисплей и держатель дисплея.

4. Соедините дисплей и держатель дисплея.

5. Соедините монтажные пластины и штатную рамку.

6. Соедините монтажные пластины и штатную рамку.

7. Соедините головное устройство и штатную рамку магнитолы.

8. Соедините головное устройство и штатную рамку магнитолы.

9. Подключите соединительный кабель к дисплею.

10. Закрепите дисплей для завершения установки.