

TS06 Assembly Instruction

1

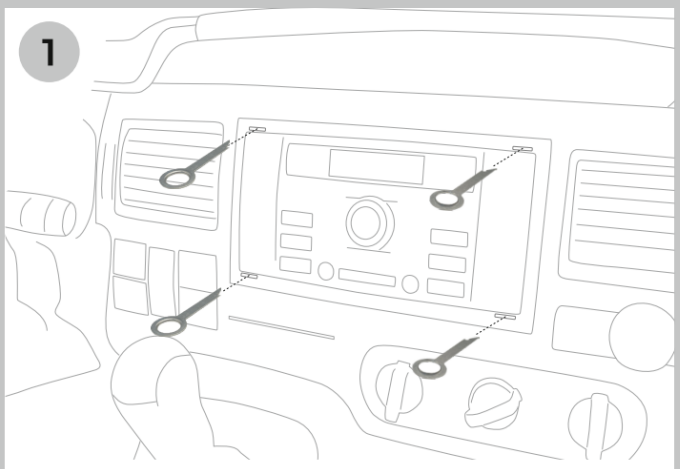


Remove the original radio by inserting the four release keys

2

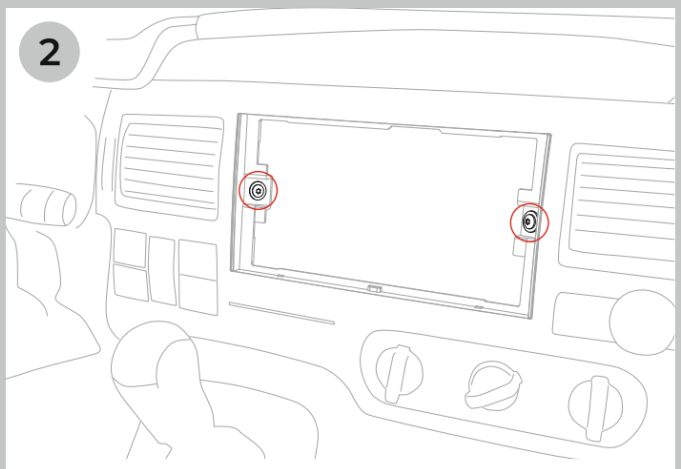


Remove two screws from the original radio bezel

3

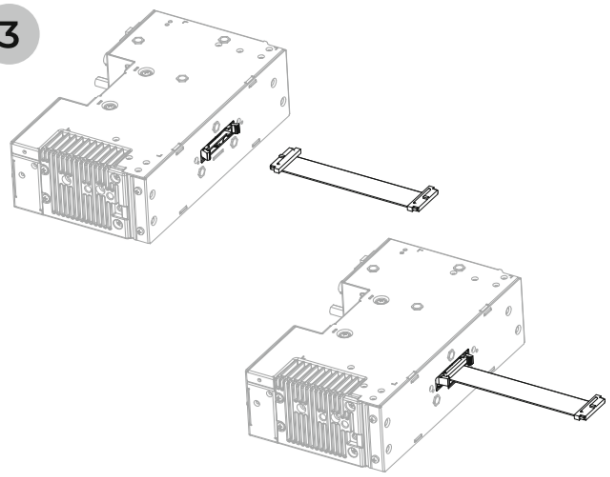


Connect the connection cable to the main unit

4

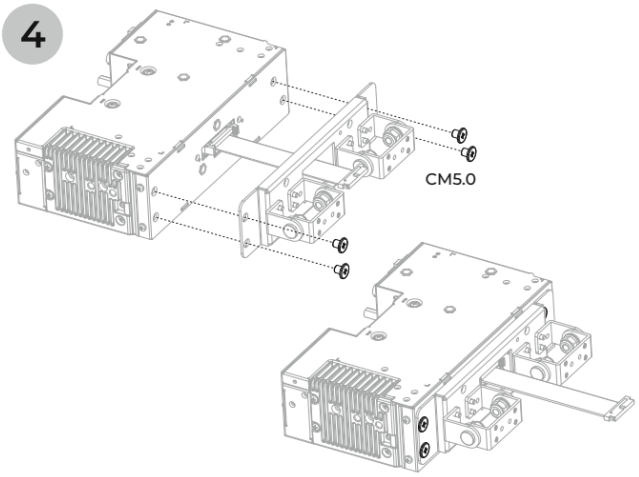


Put the main unit and rotary damper together

5

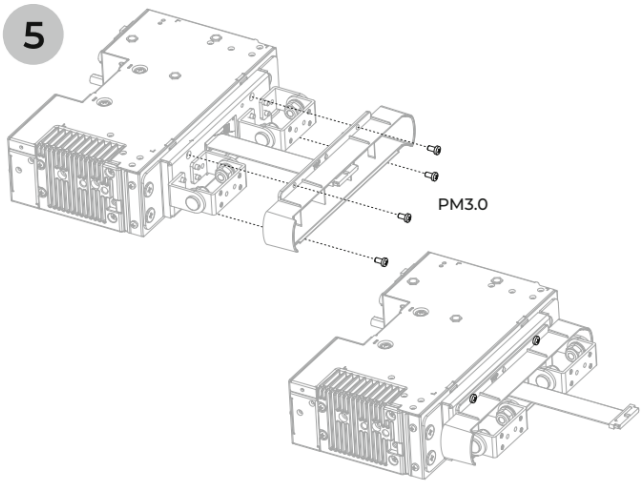


Put the main unit and rotary damper together

6

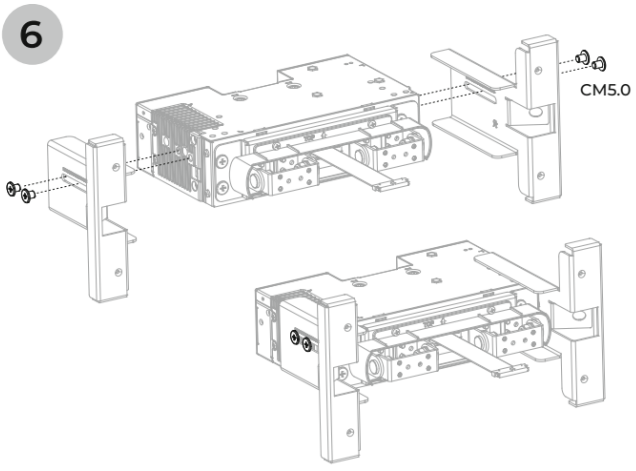


Put the main unit and mounting plates together

7

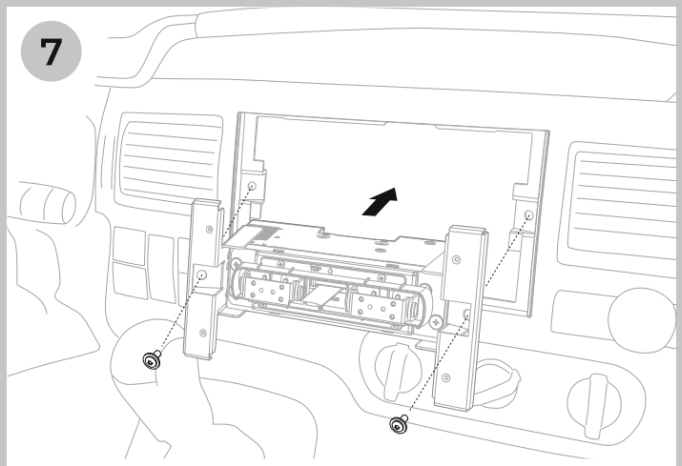


Put the main unit and the original radio bezel together

8

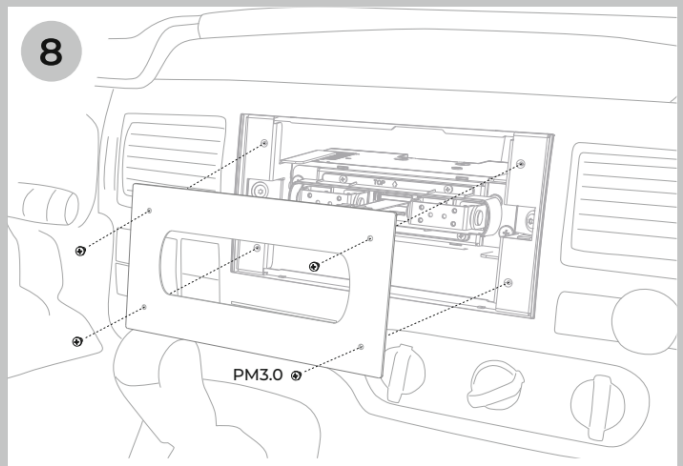


Put the main unit and the plastic plate together

9

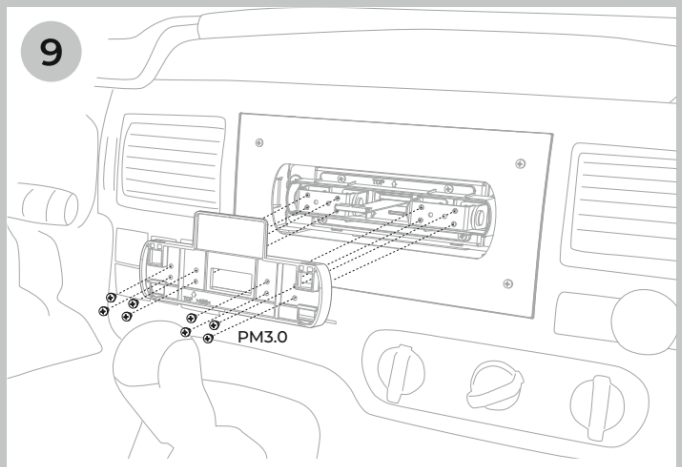


Put the radio main unit and monitor stand together

10

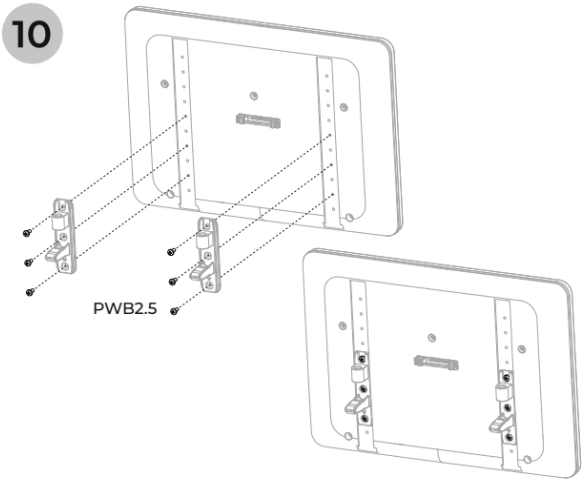

Put the display and the display holder together

11

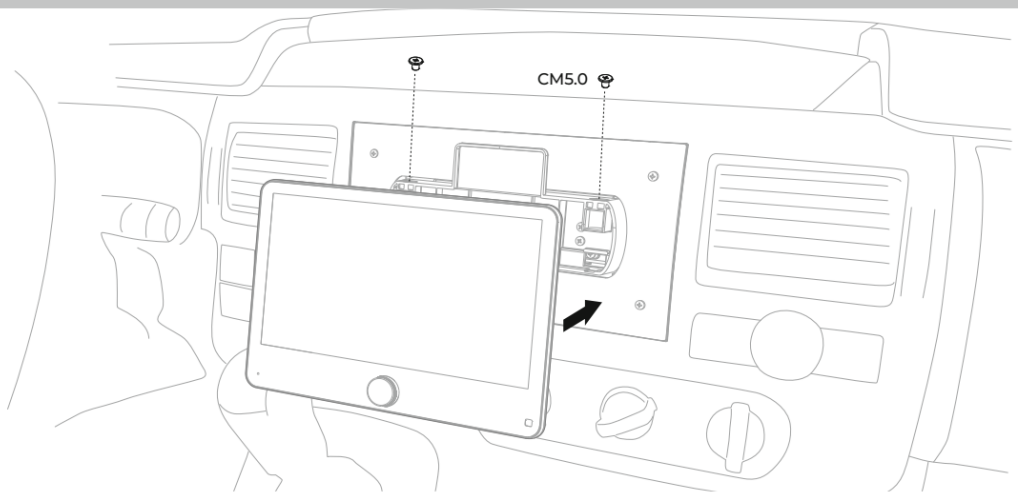

Install the radio main unit and fix the display

TS06 — Assembly instructions

The diagram numbers correspond to the steps below. Use the screw type and size shown for each diagram, such as CM5.0, PM3.0 or PWB2.5. Original Car Screws means the vehicle’s original screws. The manufacturer diagrams are preserved unchanged.

1. Remove the original radio by inserting the four release keys.

2. Remove two screws from the original radio bezel.

3. Connect the connection cable to the main unit.

4. Assemble the main unit and rotary damper as illustrated.

5. Assemble the main unit and rotary damper as illustrated.

6. Put the main unit and mounting plates together.

7. Put the main unit and original radio bezel together.

8. Put the main unit and plastic plate together.

9. Put the radio main unit and monitor stand together.

10. Put the display and display holder together.

11. Install the radio main unit and secure the display.