

TS06 Assembly Instruction

1

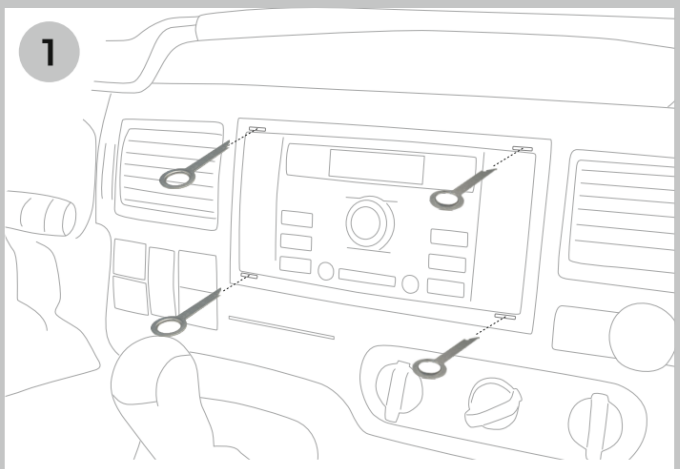


Remove the original radio by inserting the four release keys

2

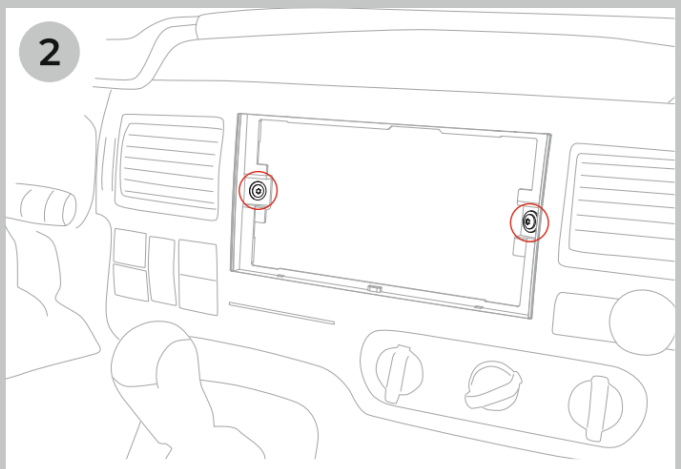


Remove two screws from the original radio bezel

3

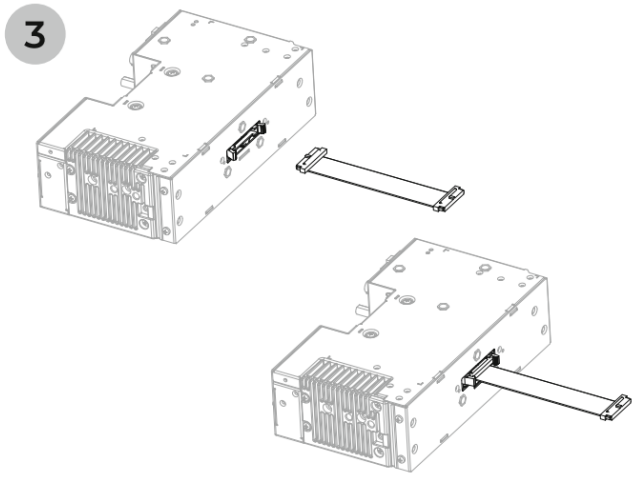


Connect the connection cable to the main unit

4

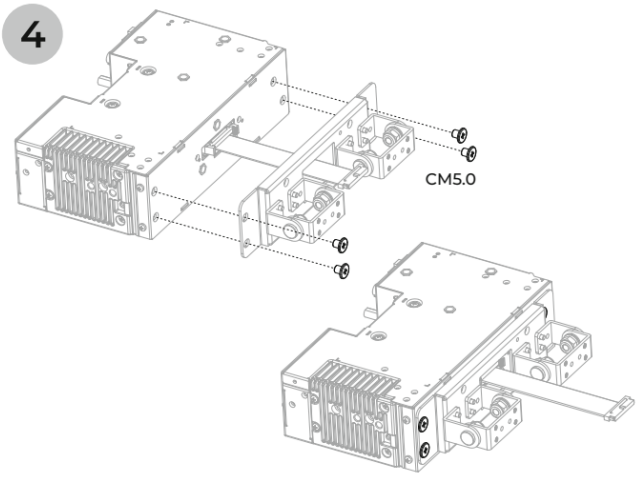


Put the main unit and rotary damper together

5

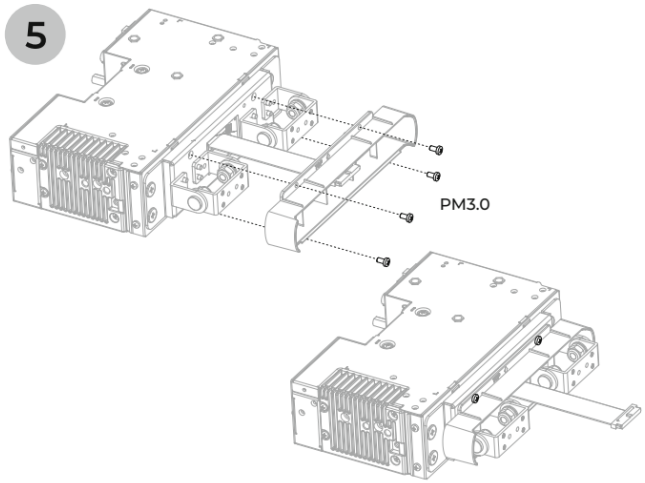


Put the main unit and rotary damper together

6

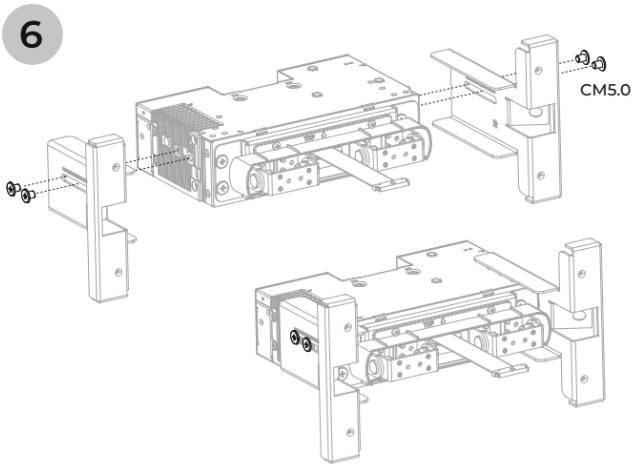


Put the main unit and mounting plates together

7

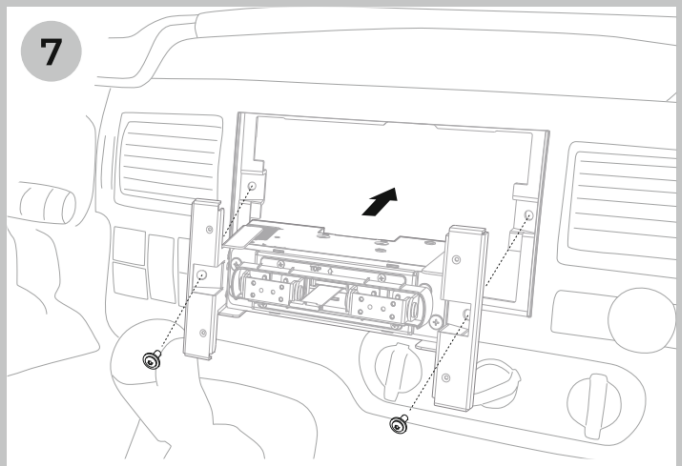


Put the main unit and the original radio bezel together

8

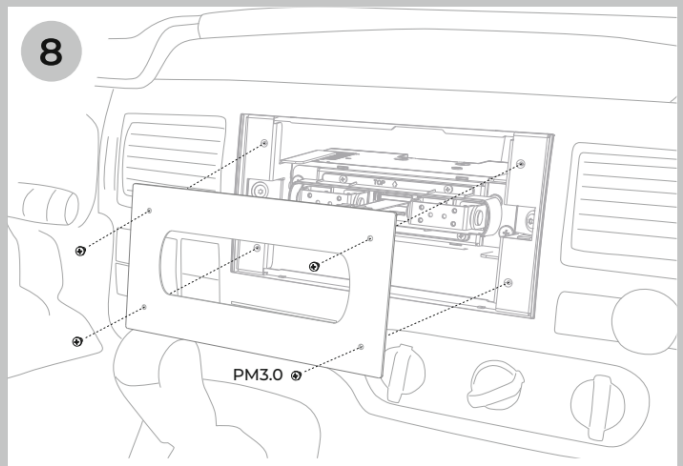


Put the main unit and the plastic plate together

9

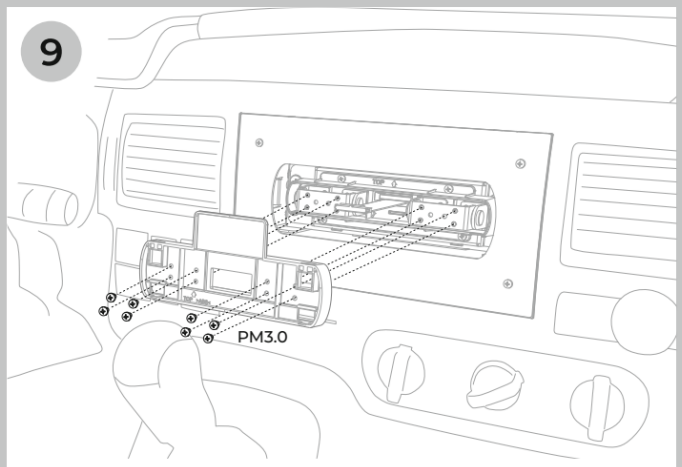


Put the radio main unit and monitor stand together

10

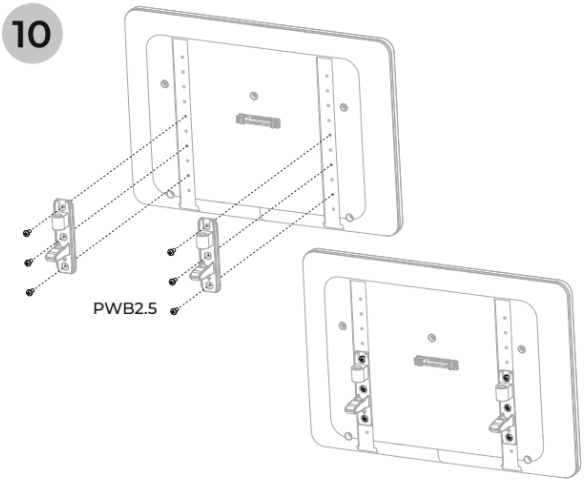

Put the display and the display holder together

11

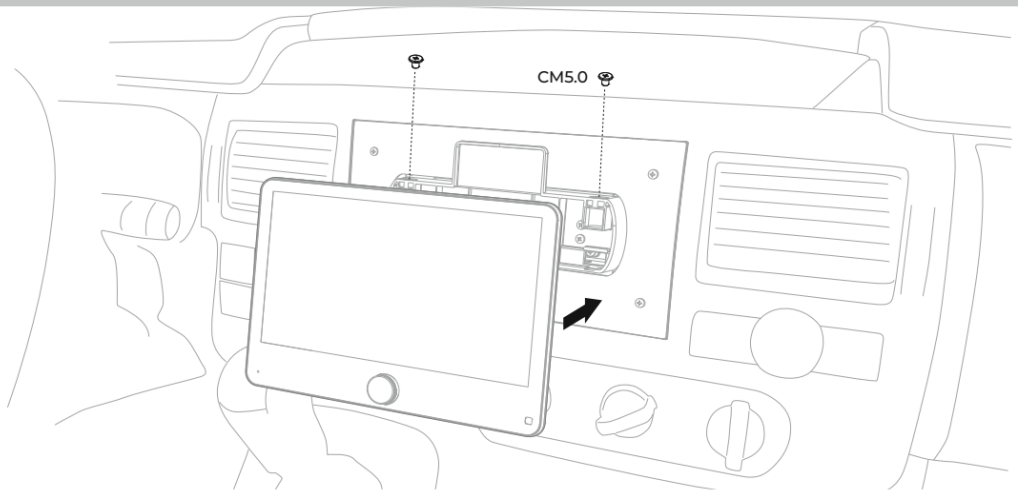

Install the radio main unit and fix the display

TS06 — Paigaldusjuhend

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Eemalda originaalraadio nelja eemaldusvõtme abil.

2. Eemalda originaalse raadioraami kaks kruvi.

3. Ühenda ühenduskaabel põhiseadmega.

4. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

5. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

6. Ühenda põhiseade ja paigaldusplaadid.

7. Ühenda põhiseade ja auto originaalne raadioraam.

8. Ühenda põhiseade ja plastplaat.

9. Ühenda raadio põhiseade ja ekraani tugikinnitus.

10. Kinnita ekraan ekraanihoidikule.

11. Paigalda raadio põhiseade ja kinnita ekraan.