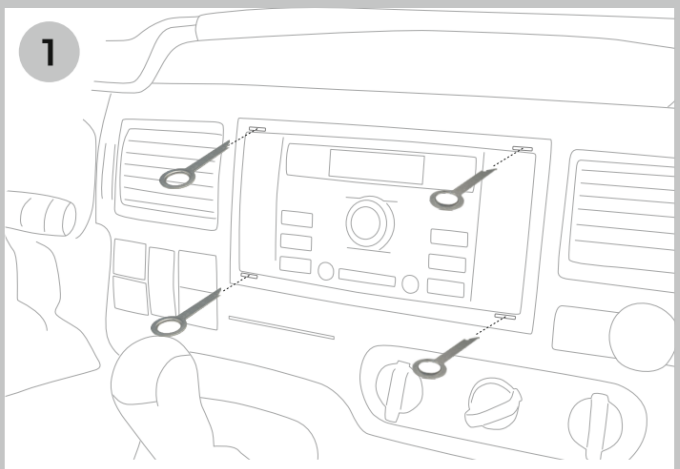
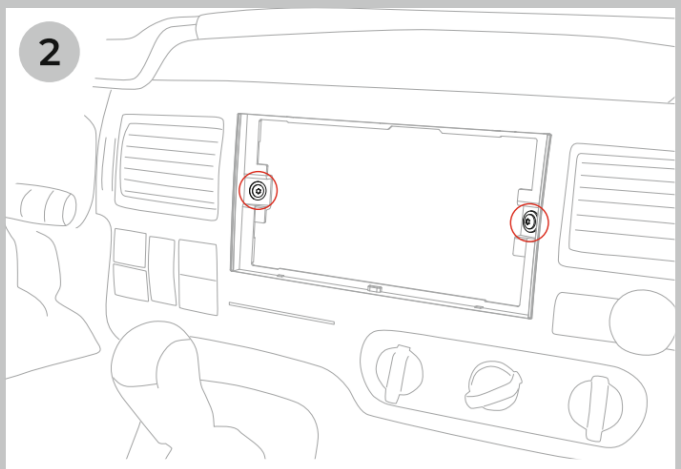
# TS06 Assembly Instruction

1



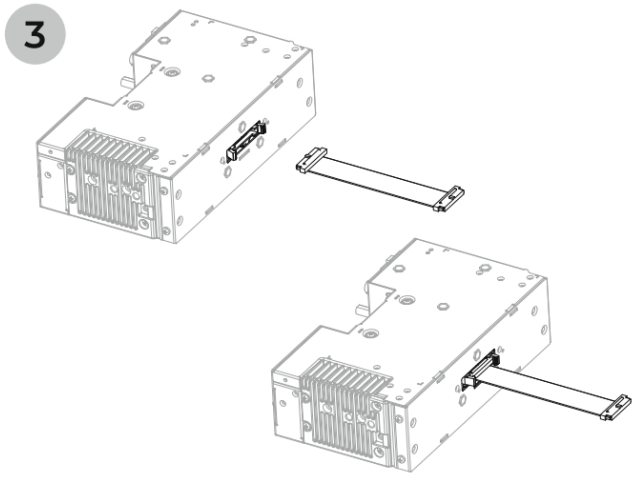
Remove the original radio by inserting the four release keys

2



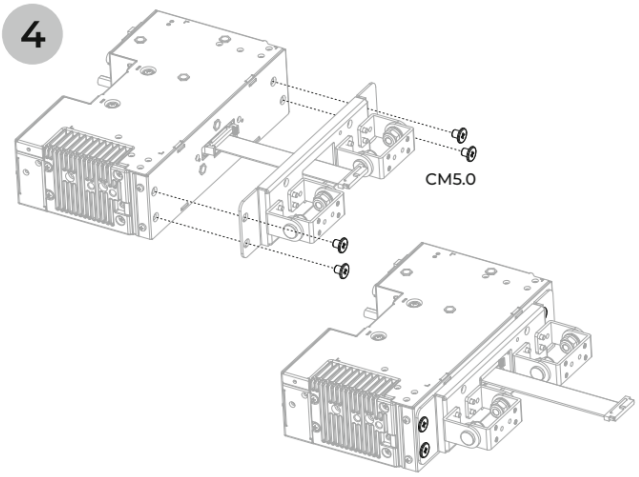
Remove two screws from the original radio bezel

3



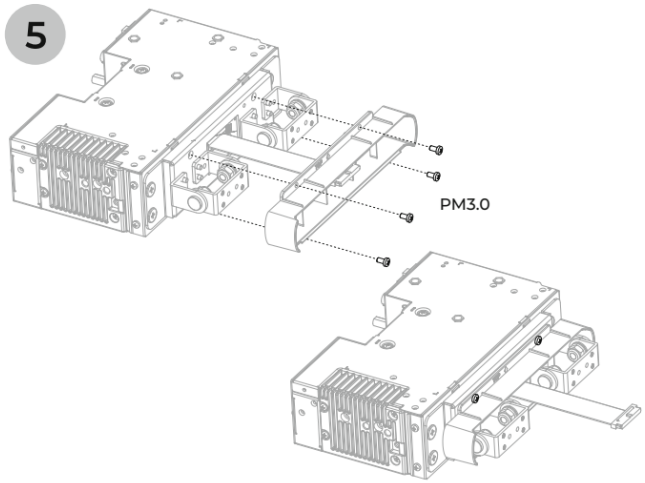
Connect the connection cable to the main unit

4



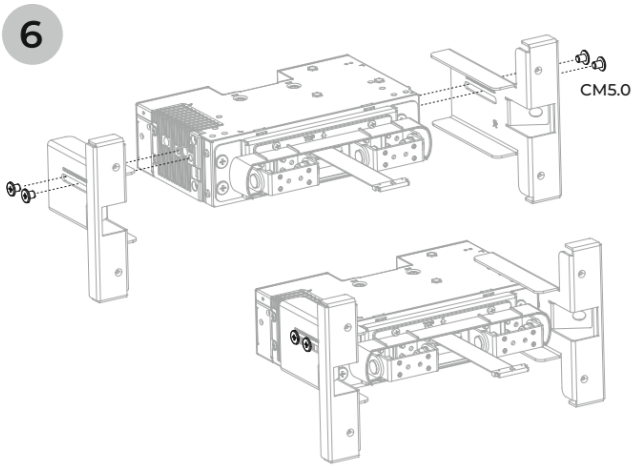

Put the main unit and rotary damper together

5



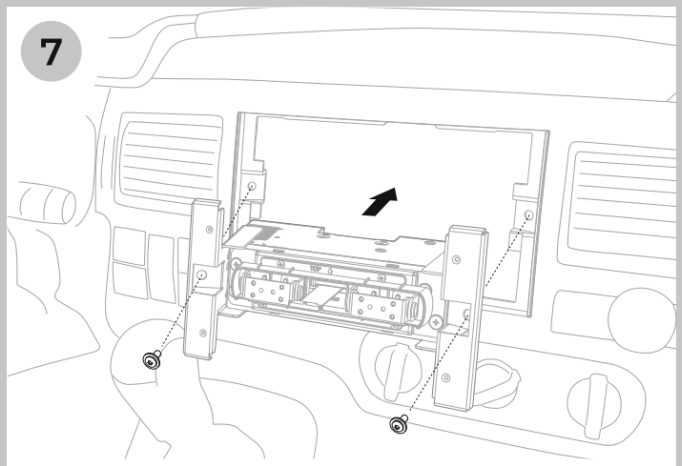

Put the main unit and rotary damper together

6



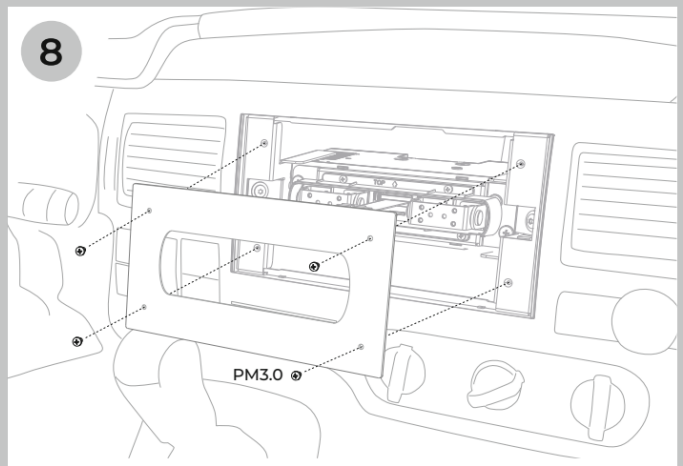

Put the main unit and mounting plates together

7



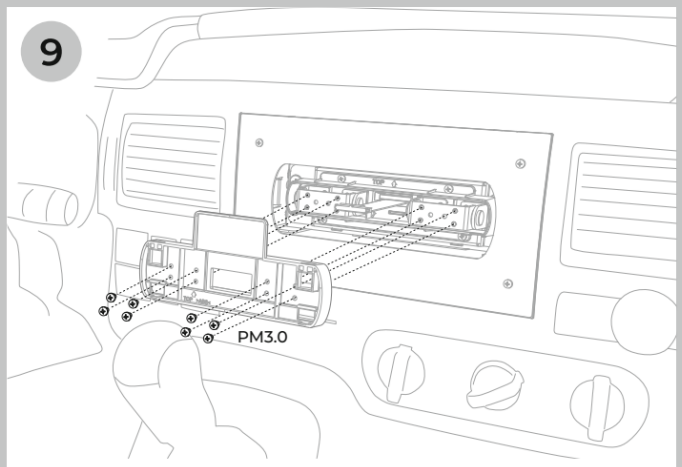
Put the main unit and the original radio bezel together

8



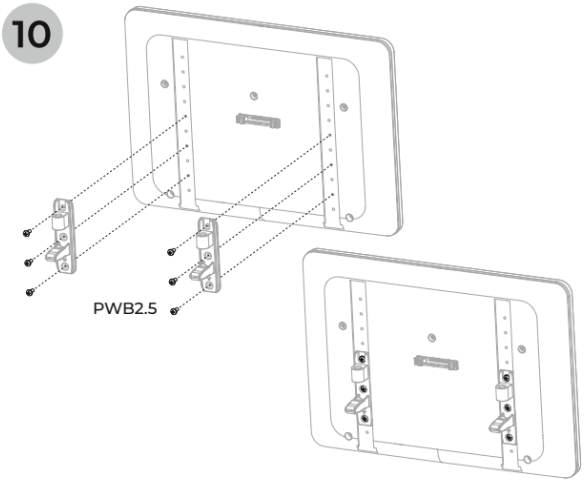

Put the main unit and the plastic plate together

9



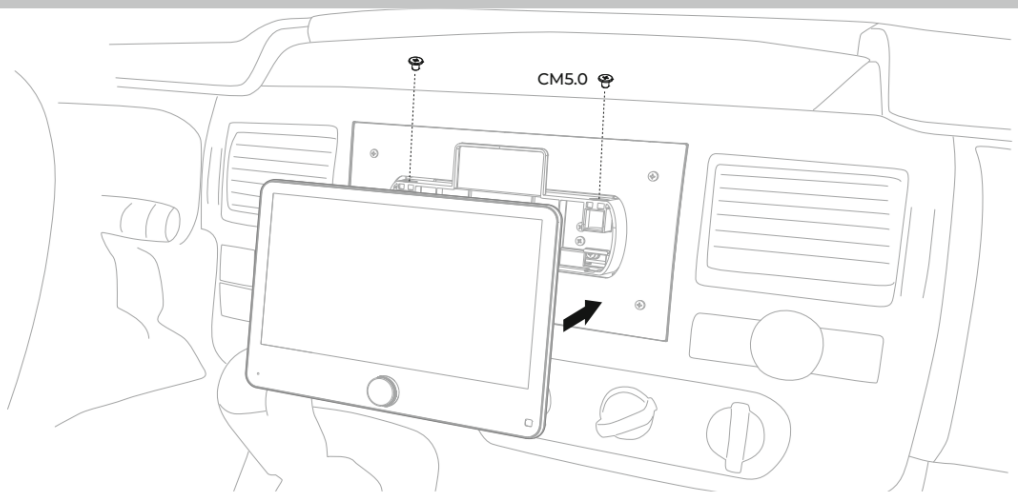

Put the radio main unit and monitor stand together

10




Put the display and the display holder together

11




Install the radio main unit and fix the display

# TS06 — Asennusohje

Kuvien numerot vastaavat alla olevia vaiheita. Käytä kunkin kuvan yhteydessä ilmoitettua ruuvityyppiä ja kokoa (esimerkiksi CM5.0, PM3.0, PWB2.5). Original Car Screws tarkoittaa auton alkuperäisiä ruuveja. Valmistajan kuvat on säilytetty muuttamattomina.

1. Irrota alkuperäinen radio neljällä irrotusavaimella.

2. Irrota alkuperäisen radiokehyksen kaksi ruuvia.

3. Liitä yhdyskaapeli päälaitteeseen.

4. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

5. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

6. Yhdistä päälaite ja asennuslevyt.

7. Yhdistä päälaite ja auton alkuperäinen radiokehys.

8. Yhdistä päälaite ja muovilevy.

9. Yhdistä päälaite ja näytön tukikiinnike.

10. Kiinnitä näyttö näytön pidikkeeseen.

11. Asenna radion päälaite ja kiinnitä näyttö.