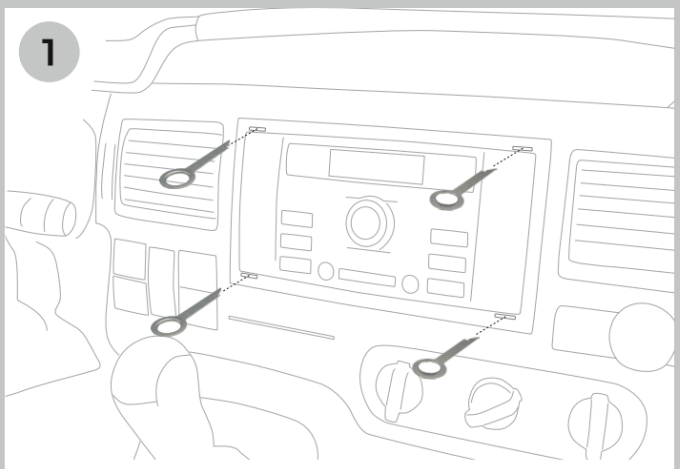
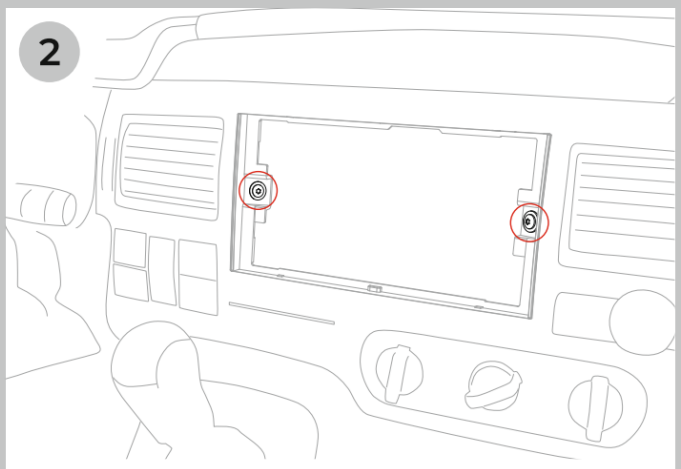
# TS06 Assembly Instruction

1



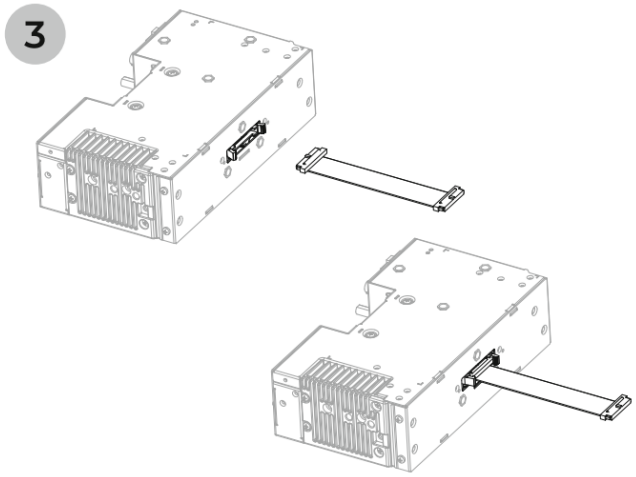
Remove the original radio by inserting the four release keys

2



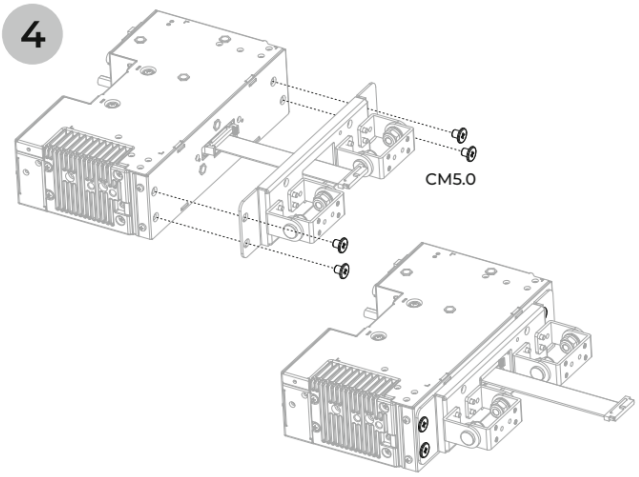
Remove two screws from the original radio bezel

3



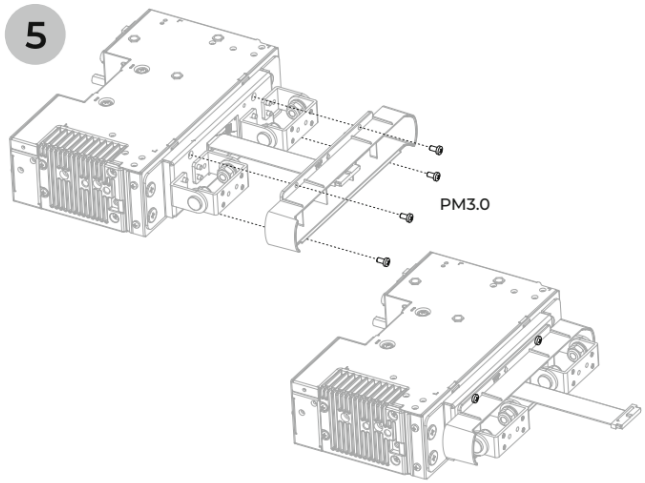
Connect the connection cable to the main unit

4



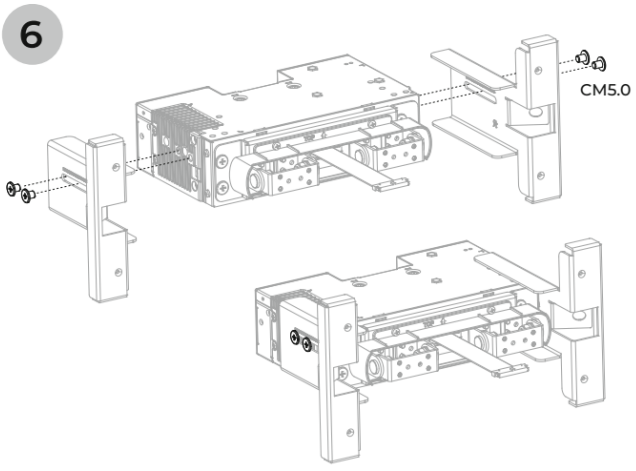

Put the main unit and rotary damper together

5



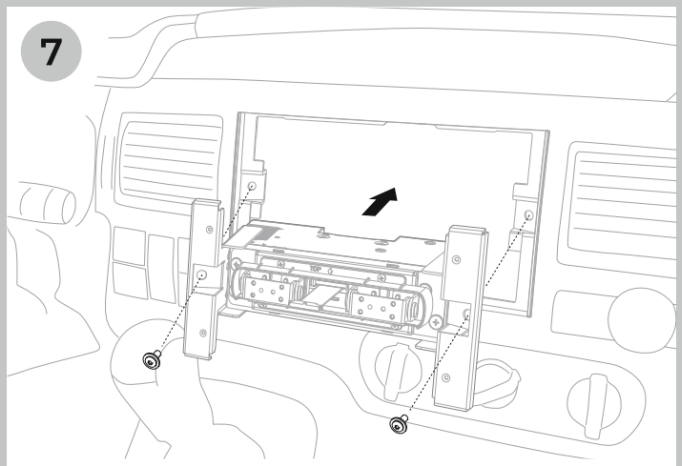

Put the main unit and rotary damper together

6



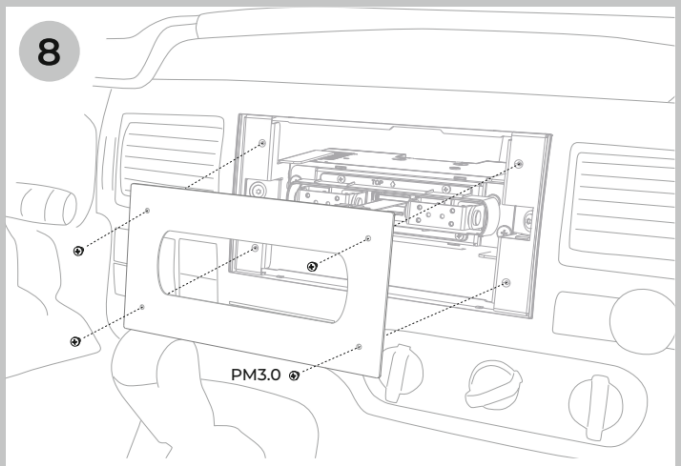

Put the main unit and mounting plates together

7



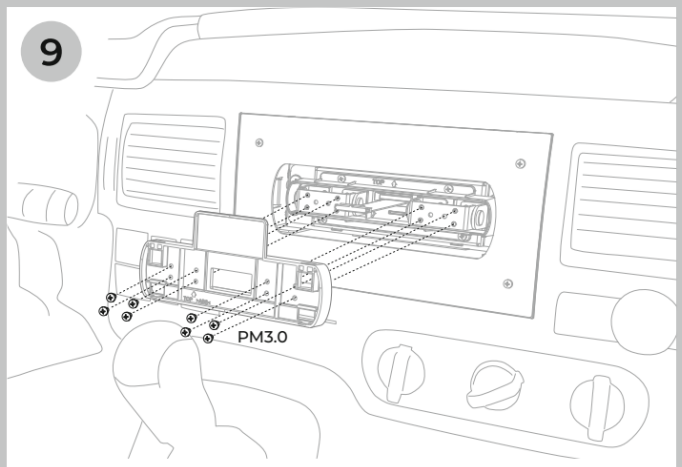
Put the main unit and the original radio bezel together

8



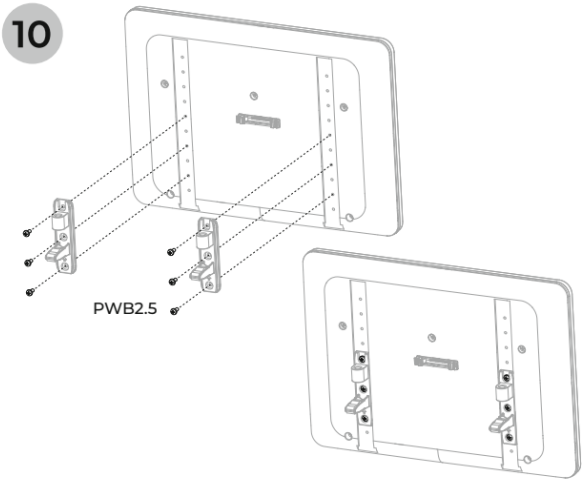

Put the main unit and the plastic plate together

9



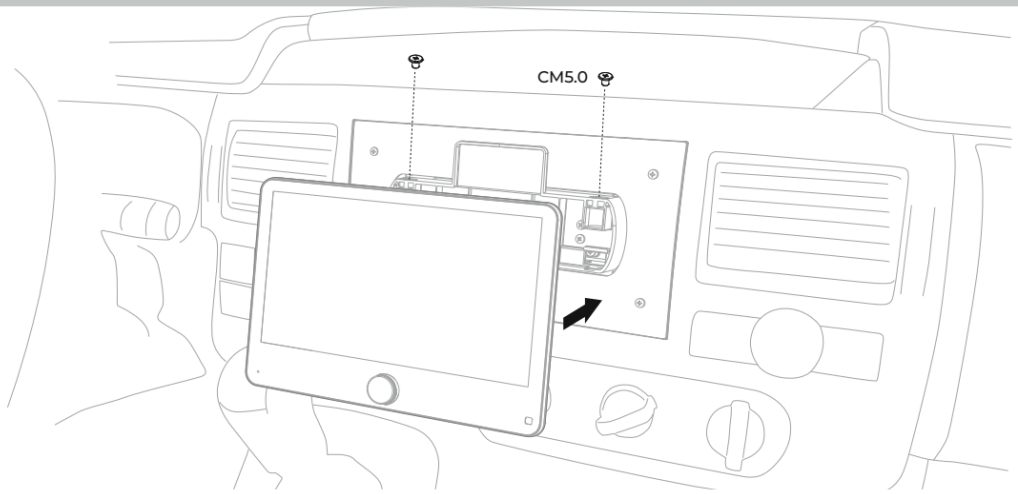

Put the radio main unit and monitor stand together

10




Put the display and the display holder together

11




Install the radio main unit and fix the display

# TS06 — Инструкция по монтажу

Номера рисунков соответствуют этапам ниже. Используйте тип и размер винтов, указанные на соответствующем рисунке, например CM5.0, PM3.0 или PWB2.5. Original Car Screws означает штатные винты автомобиля. Иллюстрации производителя сохранены без изменений.

1. Снимите штатную магнитолу, вставив четыре съёмных ключа.

2. Выкрутите два винта штатной рамки магнитолы.

3. Подключите соединительный кабель к головному устройству.

4. Соедините головное устройство и поворотный демпфер по рисунку.

5. Соедините головное устройство и поворотный демпфер по рисунку.

6. Соедините головное устройство и монтажные пластины.

7. Соедините головное устройство и штатную рамку магнитолы.

8. Соедините головное устройство и пластиковую пластину.

9. Соедините радиоблок и опору дисплея.

10. Соедините дисплей и держатель дисплея.

11. Установите радиоблок и закрепите дисплей.