

UNI101 Assembly Instruction

1

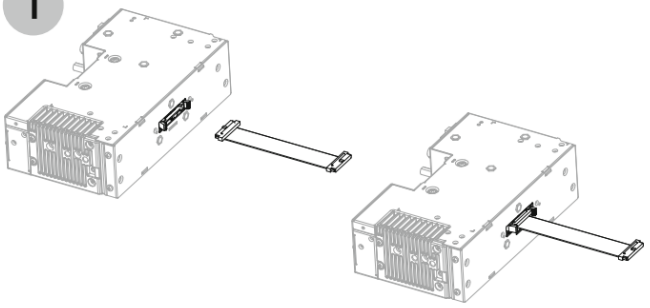


Connect the connection cable to the main unit

2

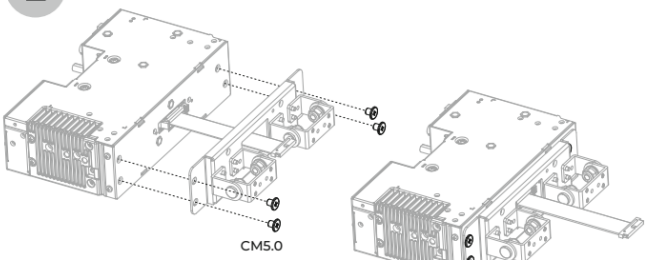


Put the main unit and rotary damper together

3

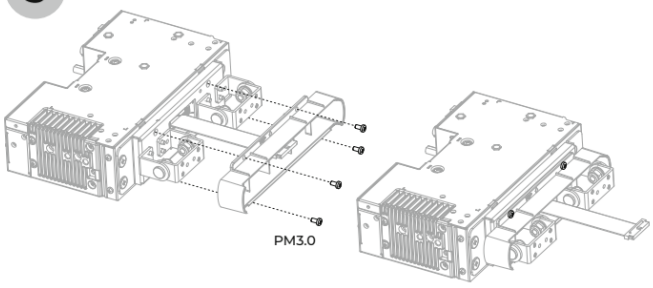


Put the main unit and rotary damper together

4

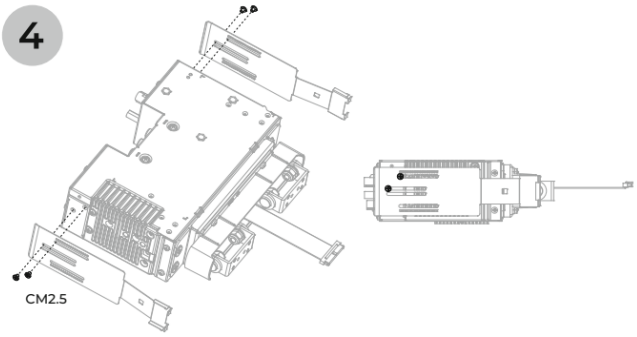


Put the main unit and mounting plates together

5

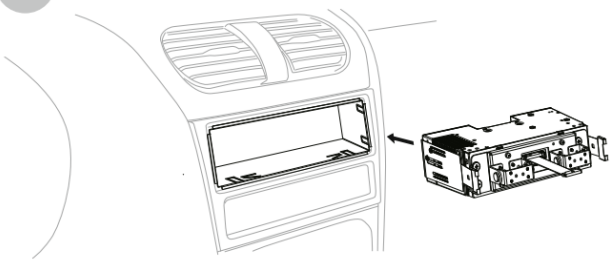


Install the metal cage to the car
and put the main unit inside the metal cage

6

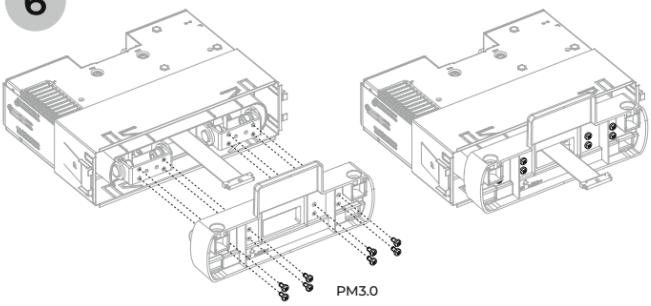


Put the radio main unit and monitor stand together

7

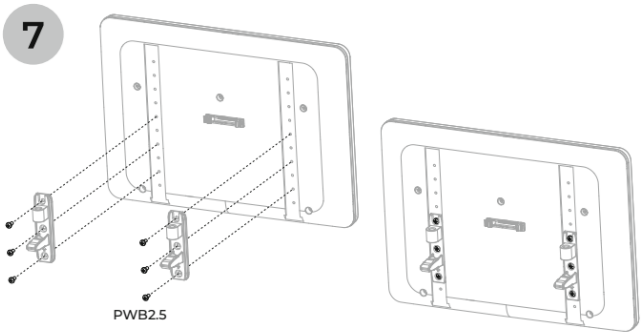

Put the display and the display holder together

8

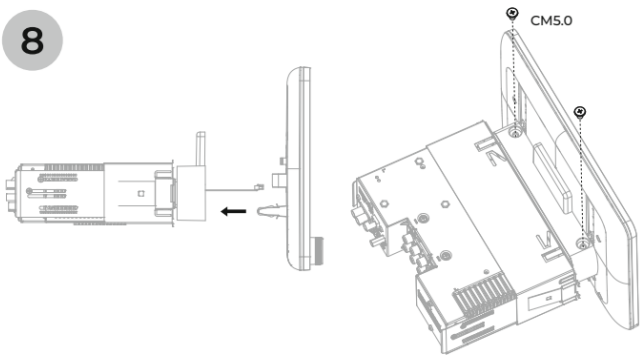

Install the radio main unit and fix the display

UNI101 — Assembly instructions

The diagram numbers correspond to the steps below. Use the screw type and size shown for each diagram, such as CM5.0, PM3.0 or PWB2.5. Original Car Screws means the vehicle’s original screws. The manufacturer diagrams are preserved unchanged.

1. Connect the connection cable to the main unit.

2. Assemble the main unit and rotary damper as illustrated.

3. Assemble the main unit and rotary damper as illustrated.

4. Put the main unit and mounting plates together.

5. Install the metal cage in the car and place the main unit inside it.

6. Put the radio main unit and monitor stand together.

7. Put the display and display holder together.

8. Install the radio main unit and secure the display.