

UNI101 Assembly Instruction

1

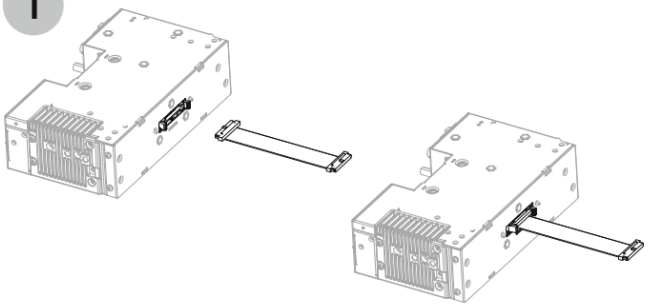


Connect the connection cable to the main unit

2

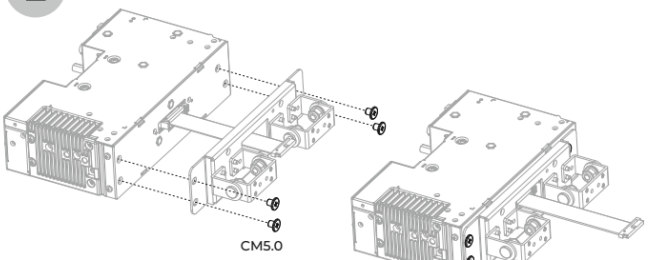


Put the main unit and rotary damper together

3

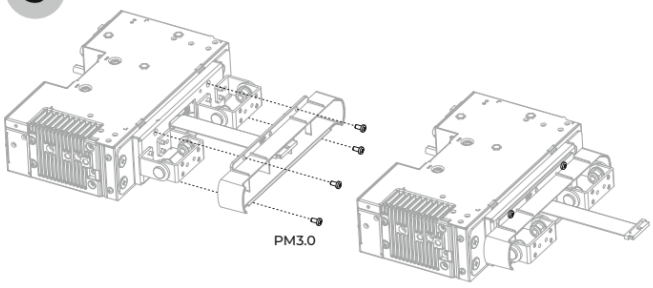


Put the main unit and rotary damper together

4

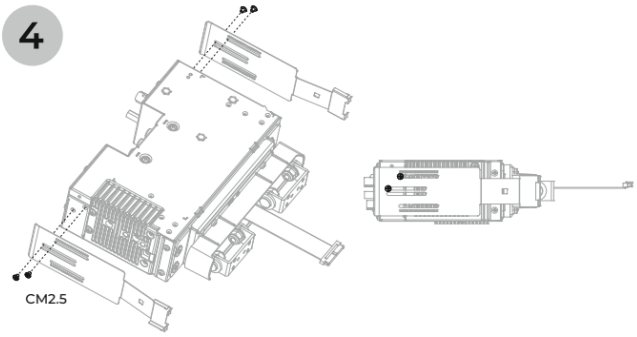


Put the main unit and mounting plates together

5

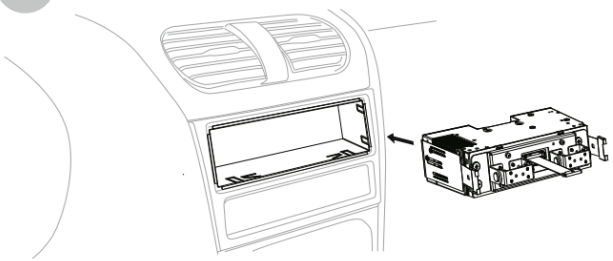


Install the metal cage to the car
and put the main unit inside the metal cage

6

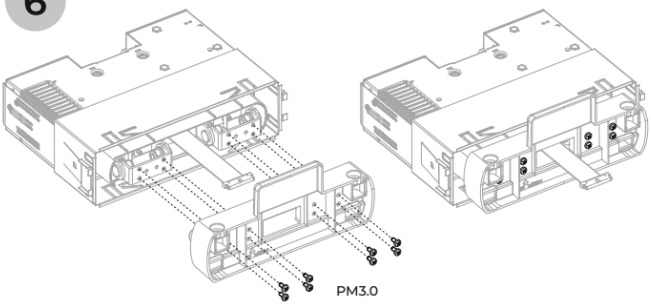


Put the radio main unit and monitor stand together

7

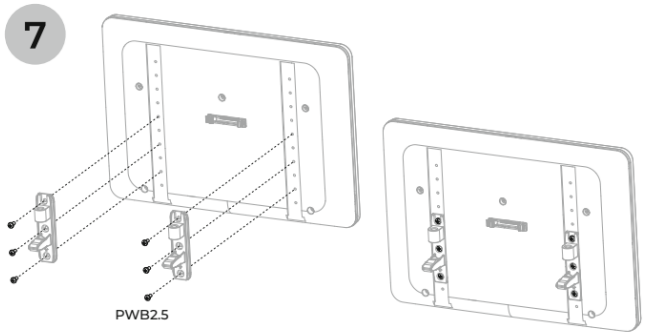

Put the display and the display holder together

8

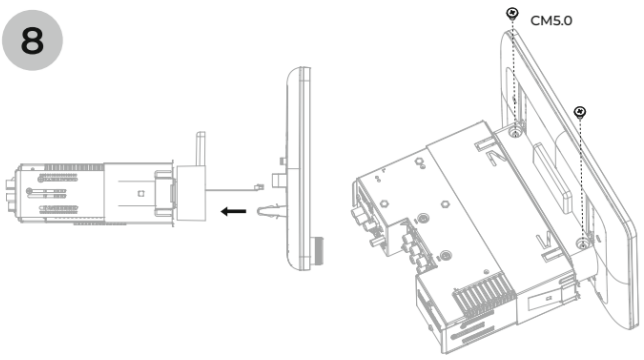

Install the radio main unit and fix the display

UNI101 — Paigaldusjuhend

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda ühenduskaabel põhiseadmega.

2. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

3. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

4. Ühenda põhiseade ja paigaldusplaadid.

5. Paigalda metallkorv autosse ja aseta põhiseade selle sisse.

6. Ühenda raadio põhiseade ja ekraani tugikinnitus.

7. Kinnita ekraan ekraanihoidikule.

8. Paigalda raadio põhiseade ja kinnita ekraan.