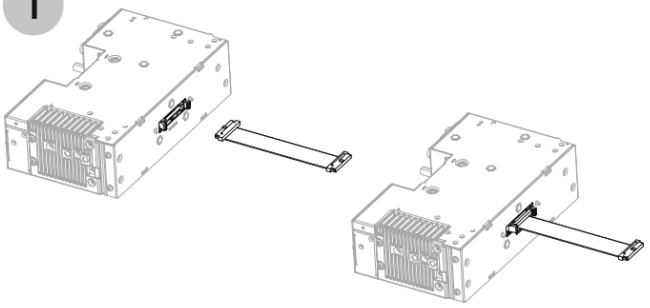
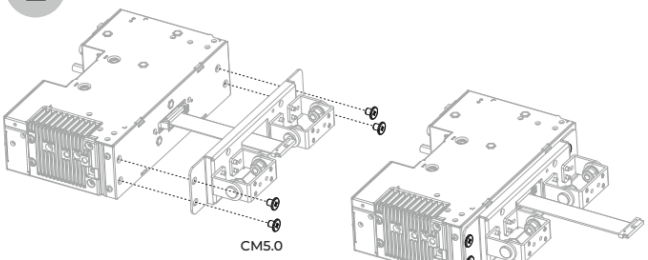
# UNI101 Assembly Instruction

1



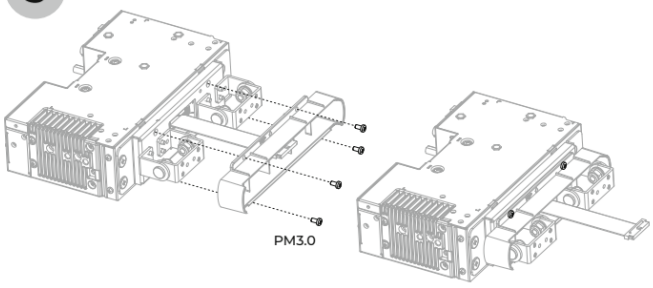
Connect the connection cable to the main unit

2



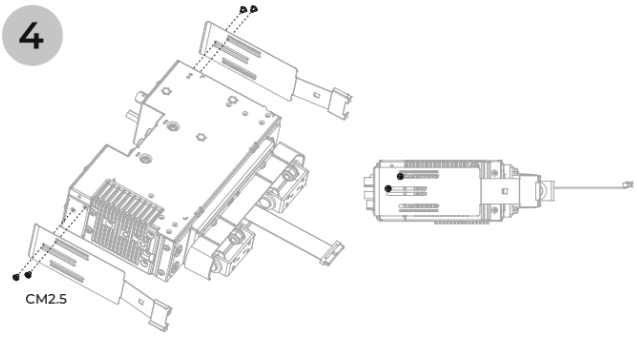

Put the main unit and rotary damper together

3



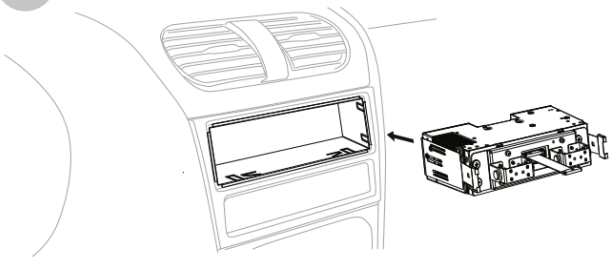

Put the main unit and rotary damper together

4



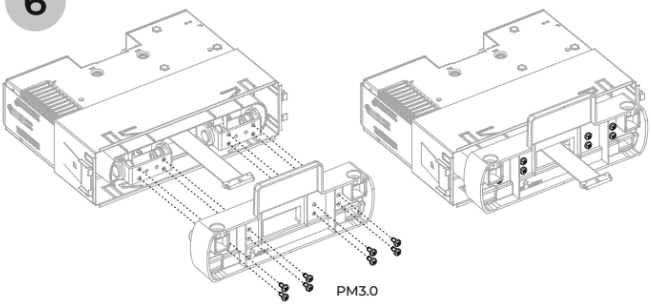

Put the main unit and mounting plates together

5



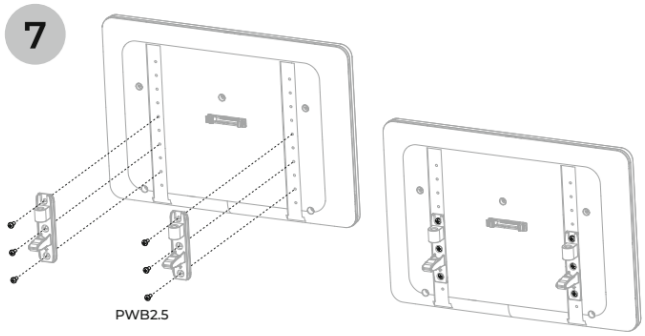
Install the metal cage to the car
and put the main unit inside the metal cage

6



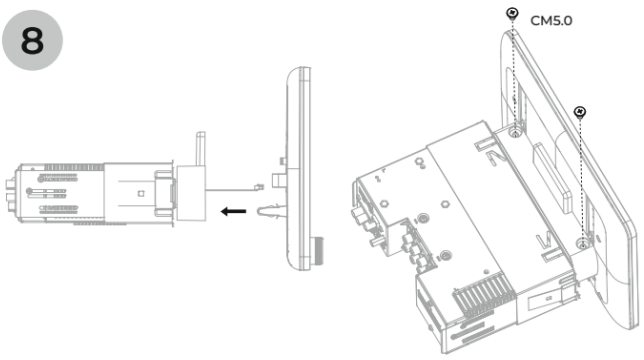

Put the radio main unit and monitor stand together

7




Put the display and the display holder together

8




Install the radio main unit and fix the display

# UNI101 — Asennusohje

Kuvien numerot vastaavat alla olevia vaiheita. Käytä kunkin kuvan yhteydessä ilmoitettua ruuvityyppiä ja kokoa (esimerkiksi CM5.0, PM3.0, PWB2.5). Original Car Screws tarkoittaa auton alkuperäisiä ruuveja. Valmistajan kuvat on säilytetty muuttamattomina.

1. Liitä yhdyskaapeli päälaitteeseen.

2. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

3. Yhdistä päälaite ja vaimennettu kääntökiinnike kuvan mukaan.

4. Yhdistä päälaite ja asennuslevyt.

5. Asenna metallikehikko autoon ja aseta päälaite sen sisään.

6. Yhdistä päälaite ja näytön tukikiinnike.

7. Kiinnitä näyttö näytön pidikkeeseen.

8. Asenna radion päälaite ja kiinnitä näyttö.