

UNI101 Assembly Instruction

1

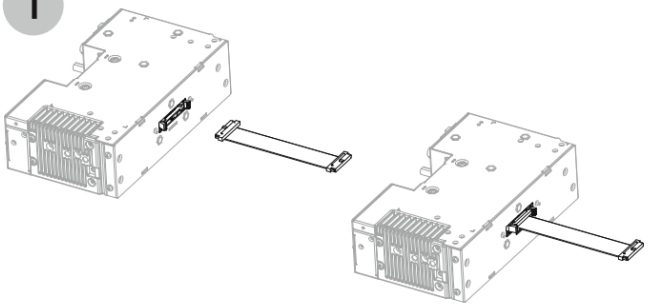


Connect the connection cable to the main unit

2

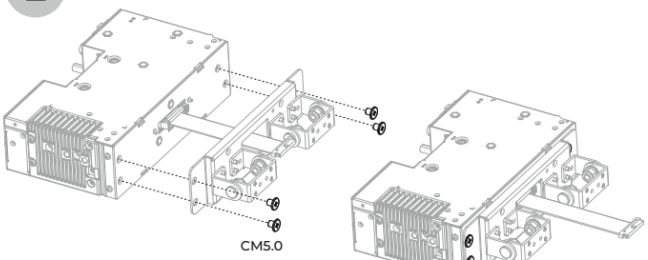


Put the main unit and rotary damper together

3

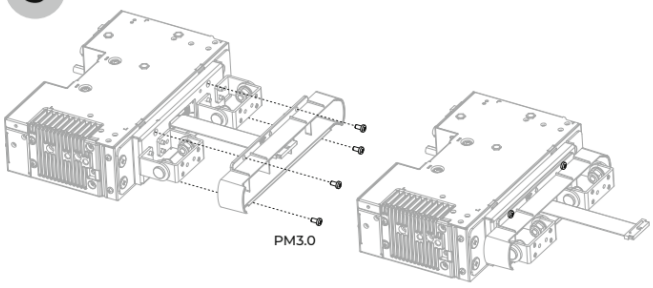


Put the main unit and rotary damper together

4

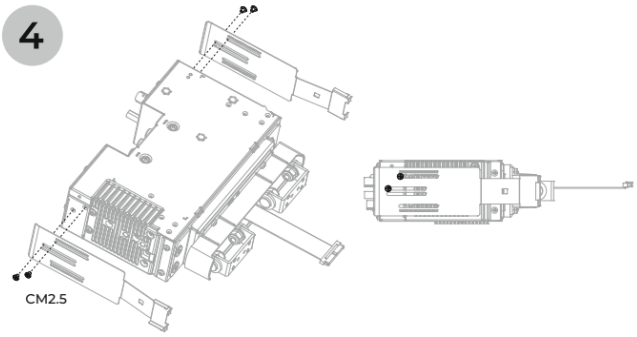


Put the main unit and mounting plates together

5

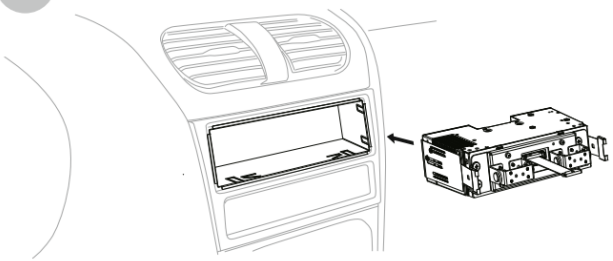


Install the metal cage to the car
and put the main unit inside the metal cage

6

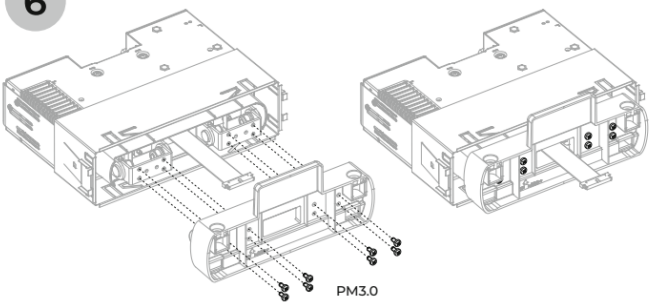


Put the radio main unit and monitor stand together

7

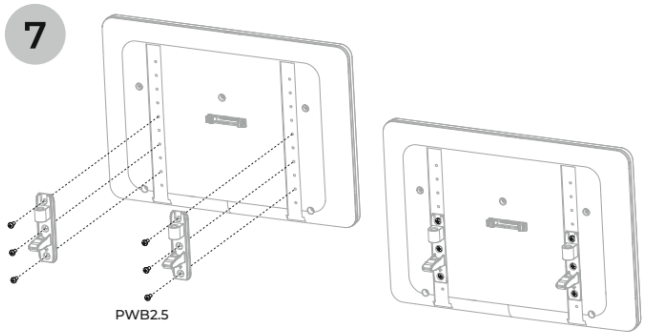

Put the display and the display holder together

8

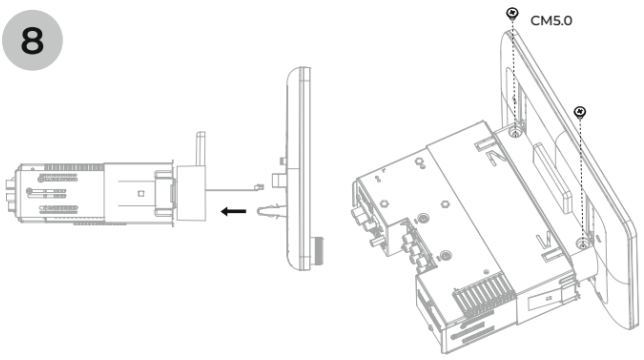

Install the radio main unit and fix the display

UNI101 — Инструкция по монтажу

Номера рисунков соответствуют этапам ниже. Используйте тип и размер винтов, указанные на соответствующем рисунке, например CM5.0, PM3.0 или PWB2.5. Original Car Screws означает штатные винты автомобиля. Иллюстрации производителя сохранены без изменений.

1. Подключите соединительный кабель к головному устройству.

2. Соедините головное устройство и поворотный демпфер по рисунку.

3. Соедините головное устройство и поворотный демпфер по рисунку.

4. Соедините головное устройство и монтажные пластины.

5. Установите металлическую монтажную корзину в автомобиль и поместите в неё головное устройство.

6. Соедините радиоблок и опору дисплея.

7. Соедините дисплей и держатель дисплея.

8. Установите радиоблок и закрепите дисплей.