

V10W2 Assembly Instruction

1

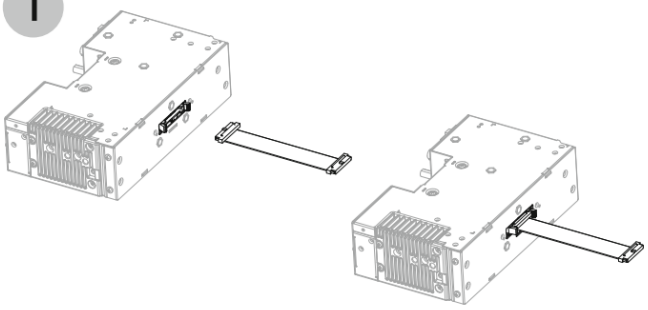


Connect the connection cable to the main unit

2

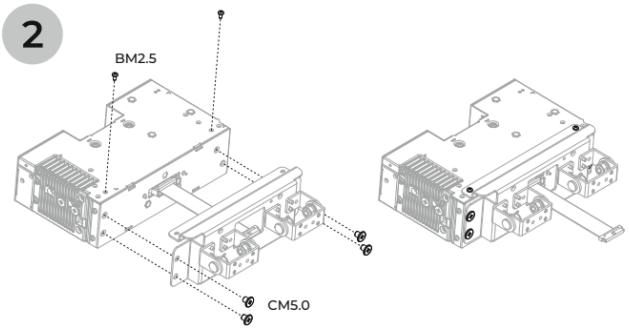


Put the main unit and rotary damper together

3

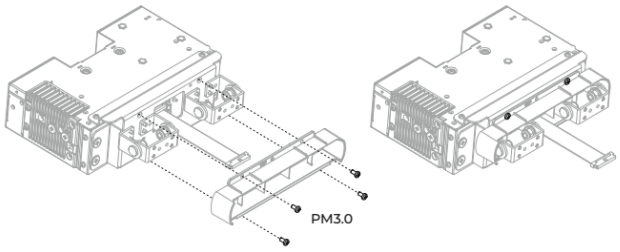


Put the main unit and rotary damper together

4

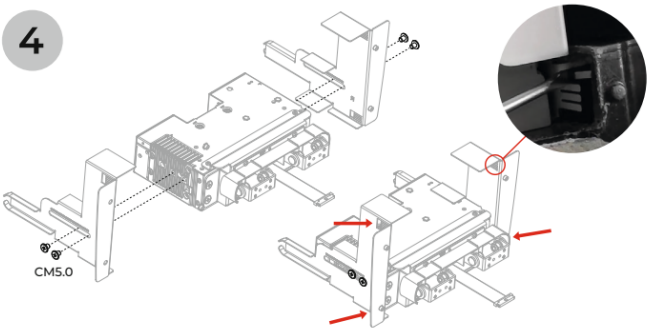


Put the main unit and mounting plates together and bend the tabs of the metal bracket at the 4 corners with a flathead screwdriver in the car

5

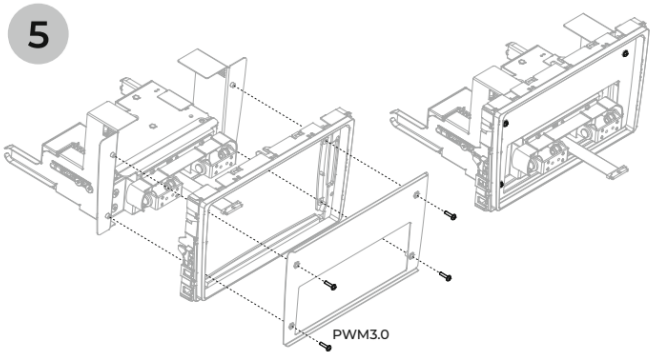


Put the main unit and radio bezel together

6

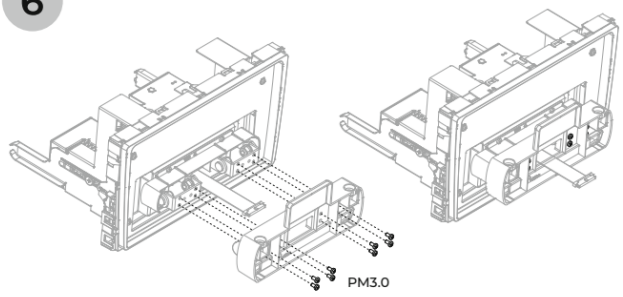


Put the radio main unit and monitor stand together

7

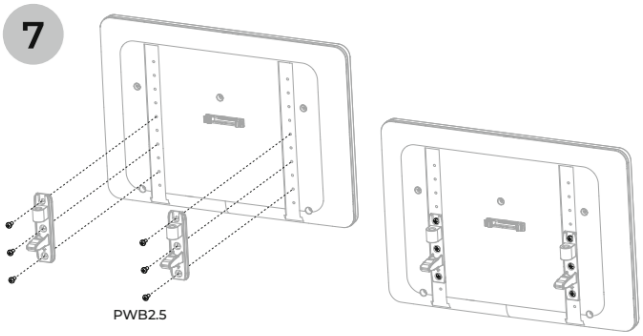

Put the display and the display holder together

8

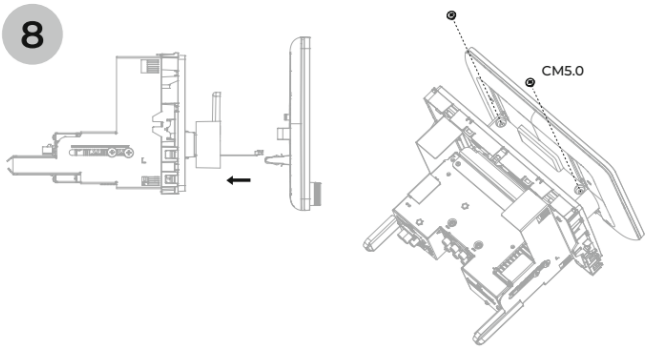

Install the radio main unit and fix the display

V10W2 — Paigaldusjuhend

Jooniste numbrid vastavad allolevatele sammudele. Kasuta iga joonise juures märgitud kruvitüüpi ja mõõtu (näiteks CM5.0, PM3.0, PWB2.5). Original Car Screws tähendab auto originaalkruvisid. Tootja joonised on säilitatud muutmata.

1. Ühenda ühenduskaabel põhiseadmega.

2. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

3. Ühenda põhiseade ja pöördliigendi summutiga kinnitus joonise järgi.

4. Ühenda põhiseade ja paigaldusplaadid. Painuta autos metallkronsteini neljas nurgas olevad kinnituskeeled lapiku kruvikeerajaga joonise järgi.

5. Ühenda põhiseade ja raadioraam.

6. Ühenda raadio põhiseade ja ekraani tugikinnitus.

7. Kinnita ekraan ekraanihoidikule.

8. Paigalda raadio põhiseade ja kinnita ekraan.