MFK-UNI101 installation guide

MFK-UNI101-S / MFK-UNI101-H - D10-UNI101 Premium and DS-UNI101

Follow illustrated steps 1-8 on the next page. Fastener labels PWB2.5, PM2.5, CM5.0 and PM3.0 are retained exactly as shown in the manufacturer diagram.

1. Put the main unit and metal bracket together, then connect the connection cable to the main unit.

2. Attach the mounting plates to the main unit.

3. Join the main unit to the rotary mechanism part shown in the diagram.

4. Secure the illustrated rotary mechanism part to the main unit.

5. Join the radio main unit and monitor stand together.

6. Install the metal frame in the car and put the main unit inside the metal frame.

7. Join the display and display holder together.

8. Install the radio main unit and secure the display.


Compare the installation opening with the selected S/H frame dimensions before installation. Use the fasteners shown for the specific illustrated step; do not guess screw types. This guide does not establish electrical compatibility or fitment to every vehicle dashboard.

Allikas / Source: Dynavin - MFK-UNI101 and T5TPAPT Assembly Instruction.

Original manufacturer assembly diagrams


Assembly Instruction

1

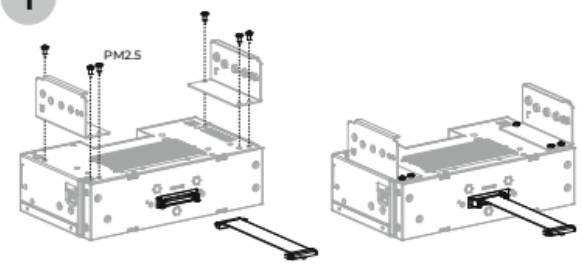


Put the main unit and metal bracket together
and connect the connection cable to the main unit

2

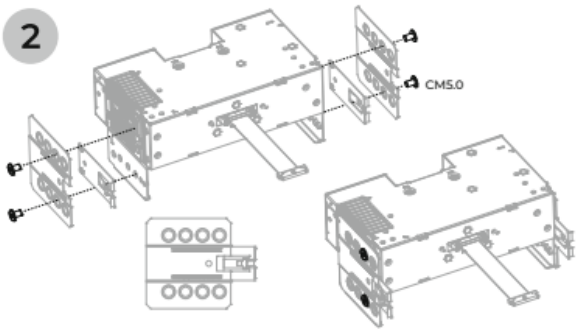


Put the main unit and mounting plates together

3

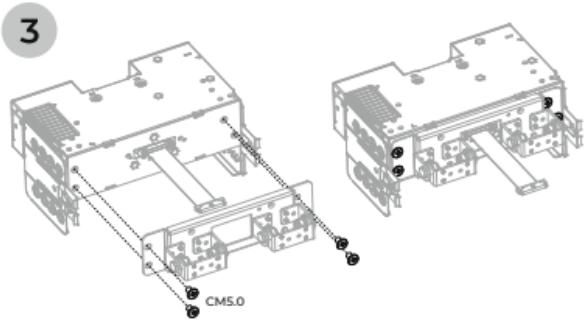


Put the main unit and rotary damper together

4

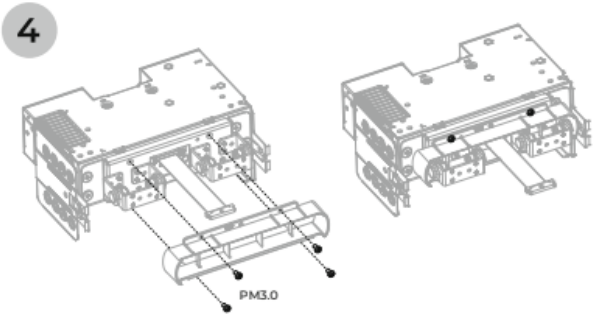


Put the main unit and rotary damper together

5

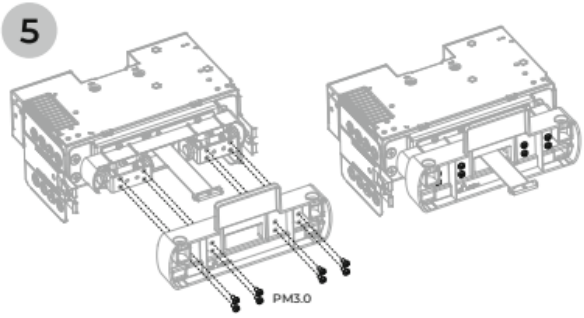


Put the radio main unit and monitor stand together

6

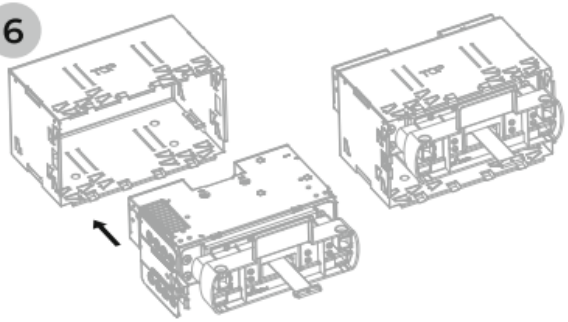


Install the metal frame to the car
and put the main unit inside the metal frame

7

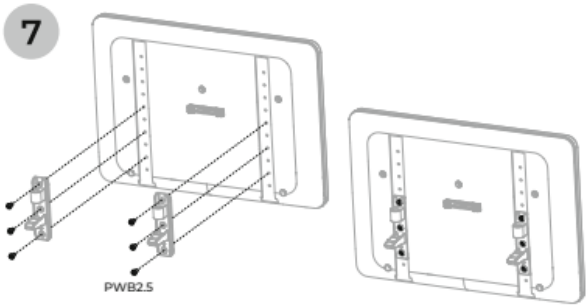

Put the display and the display holder together

8

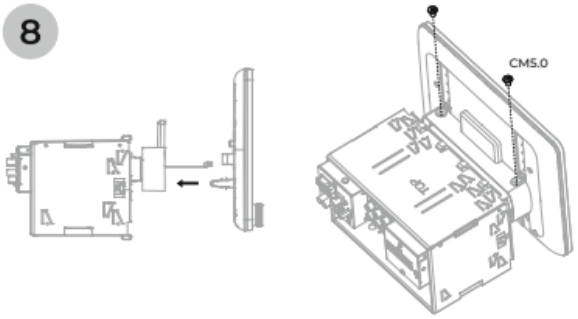

Install the radio main unit and fix the display